


**Product Description:**

The E1260™ has been upgraded to produce 95lm/W for outstanding energy savings. The light guide board and diffuser have been engineered to ensure maximum light output and complete uniformity. Suitable for a wide range of applications including office, education and commercial spaces.

**Product Image:**

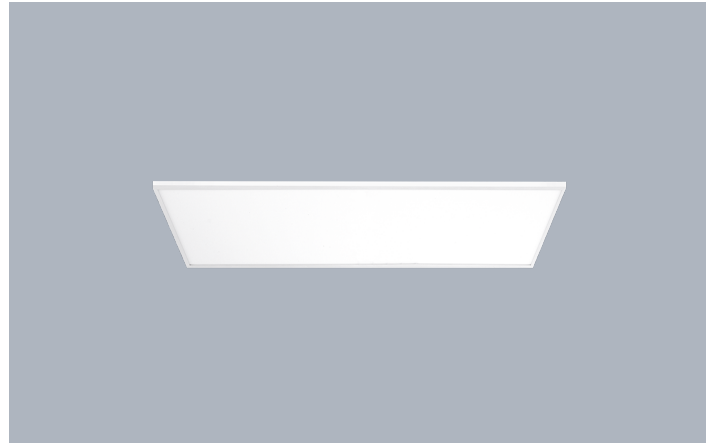


E1260™ 1200 x 600mm 50W LED Flat Panel


**Product Features:**

- Edge-lit design and optical pattern light guide engineered for even light distribution
- Suitable for installation in 15 & 24mm T-bar ceilings
- SDCM <5 providing consistent light colour quality
- UGR 19 (Unified Glare Rating) - suitable for use in offices
- Flicker free driver - Power Factor >0.9
- Life not affected by frequent switching e.g. when used with occupancy controls
- 1-10V dimmable, DALI and emergency versions available
- Surface mount box and adjustable suspension kit available
- 1.5kV surge protection
- 3 year warranty

**Line Drawing Image**



**Polar Curve Image**



## Product Specs:

Technology	LED	Number of LEDs	260
Lifetime L70 (hrs)	30000	Input Voltage	220~240V AC
Input Frequency	50/60HZ	Dimmable	No
Dali	No	IP Rating	IP20
Operating Env. Temp. (Min) °C	-20	Operating Env. Temp. (Max) °C	40
Power Factor	0.9	Lamp Base	None
Height (mm)	10	Length (mm)	1195
Width (mm)	595	Surge Protection (kV)	1.5
SDCM	5		





## SKU Table and Ordering

SKU Code	Wattage	Lumens	Lumens/Watt	Colour	Beam Angle	Ra	SDCM
EN-FP1260C/40	50	5500	110	4000	110	80	5
EN-FP1260C/50	50	5500	110	5000	110	80	5
EN-FP1260CDA/40	50	5500	110	4000	110	80	5
EN-FP1260CDA/50	50	5500	110	5000	110	80	5
EN-FP1260CV/40	50	5500	110	4000	110	80	5
EN-FP1260CV/50	50	5500	110	5000	110	80	5

## Compliance & Approvals:



## Accessories:

SKU Image	SKU Code	Description
	EN-CRM1260A	1200 x 600mm Panel Recess Mount
	EN-SK100B	Panel Adjustable Suspension Kit
	EN-LPEM2	3 Hour Non-Maintained Emergency Pack for Enlite Panel Range
	EN-SM106B	1200 x 600 x 74mm Panel Surface Mount

## Warranty

This product has a warranty period of 3 Years. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

**UK Enlite Sales & Distribution**  
Apex Park  
6 Little Burrow  
Welwyn Garden City AL7 4SW  
United Kingdom  
Tel : +44 (0) 1707 35 18 20