


Code: 7EBCRRTBL-B

Hartland CFX | HARTLAND CFX RANGE | Rocker Switches

Product Image



Wiring

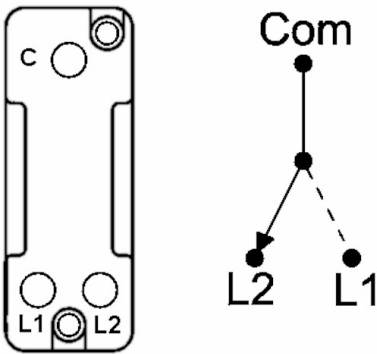


Dimensions

Hamilton®
HARTLAND CFX

CFXRRT

Push to Make/Push to Break Retractive Rocker

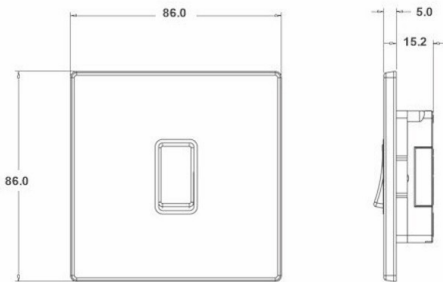

Insert Type

1 gang 10AX Push To Make/Push to Break Retractive Rocker

Insert Colour

Black/Black

EAN13 Barcode

5017504012144

Commodity Code

85363010

Luckins TSI

398274331

Dimensions(Nominal)

Single: Height = 86.0mm Width = 86.0mm Depth = 5.0mm

Switched Poles

Single

Current Rating

10AX

Voltage

220/250V AC

Maximum Load

10 Amp inductive

Mains Frequency

50Hz

IP Rating

IP2XD

Contact Gap Minimum

3mm

Terminal Capacity 1

5x1mm²

Terminal Capacity 2

4x1.5mm²

Terminal Capacity 3

1x2.5mm²

Terminal Capacity 4

1x4mm² Multi-strand

Terminal Capacity 5

1x6mm²

Earth Terminal Capacity 1

5x1mm²

Earth Terminal Capacity 2

4x1.5mm²

Earth Terminal Capacity 3

3x2.5mm²

Earth Terminal Capacity 4

1x4mm² Multi-strand

Earth Terminal Capacity 5

1x6mm²

Product Class 1

Must be earthed

Ambient Operating Temperature

-5° to +40°C

Recommended Location

Internal Use Only

Maximum Installation Altitude

2000m

Standard/Approval

BS EN 60669-1

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 5/11/2023 10:23:59 AM E&OE