



AALED1/BV/CCT/PC

Astro CCT 1 Photocell Black



Features

All polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

General Information


Lamp Type	LED
Colour / Finish	Black / Visiluxe
Photocell	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L80 B50 60,000h
Warranty (Years)	5
CE Mark	Yes
Length (mm)	200 mm
Width (mm)	200 mm
Depth (mm)	65 mm

Technical Information

Wattage	4W - 7W
Lumens Delivered	520lm - 880lm (4000K)
Lm/W	125lm/W (4000K)
Beam Angle	115
CRI	80
CCT	3000/4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 25°C
SDCM	6

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:07 AM



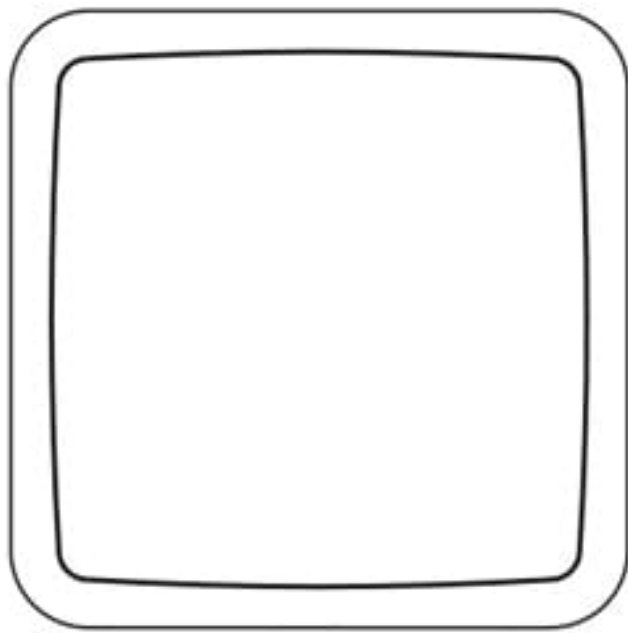

200



65