



AALED2/BV/CCT/M3

Astro CCT 2 Emergency Black



Features

All polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

General Information


Lamp Type	LED
Colour / Finish	Black / Visiluxe
Emergency	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 60,000h
Warranty (Years)	5
CE Mark	Yes
Length (mm)	260 mm
Width (mm)	260 mm
Depth (mm)	75 mm

Technical Information

Wattage	7W - 13W
Lumens Delivered	920lm - 1600lm (4000K)
Lm/W	130lm/W - 125lm/W (4000K)
Beam Angle	115
CRI	80
CCT	3000/4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	5°C to 40°C
SDCM	6

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:07 AM



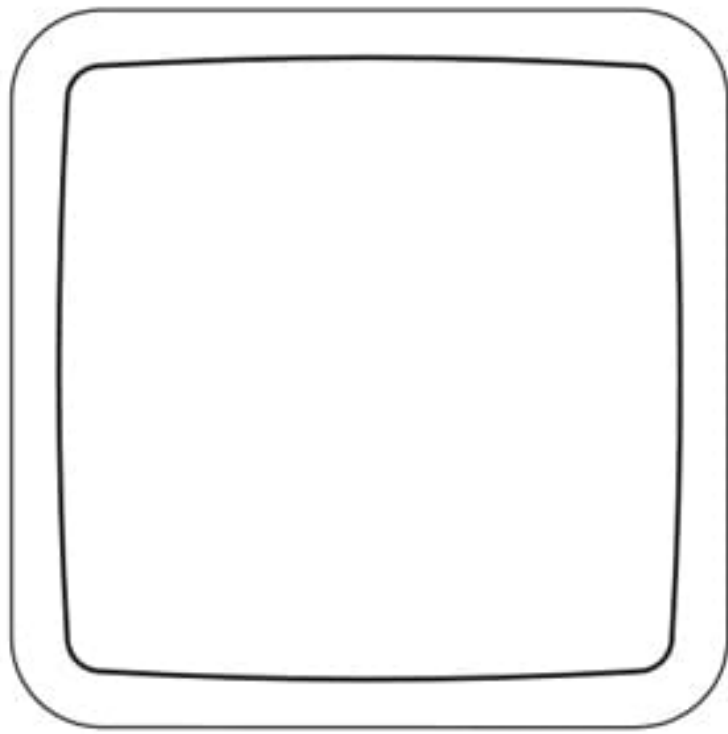

260



75