



## **AALED2/BV/CCT/MWS**

Astro CCT 2 Microwave Sensor Black



### **Features**

All polycarbonate multi-purpose LED square bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

## General Information


|                                |                     |
|--------------------------------|---------------------|
| Lamp Type                      | LED                 |
| Colour / Finish                | Black / Visiluxe    |
| Integral Microwave Sensor      | Yes                 |
| IP Rating                      | IP65                |
| IK Rating                      | IK08                |
| Class Protection               | 2                   |
| Internal / External            | Internal / External |
| Surface / Recessed / Suspended | Surface             |
| Lifetime (Hrs)                 | L70 B50 60,000h     |
| Warranty (Years)               | 5                   |
| CE Mark                        | Yes                 |
| Length (mm)                    | 260 mm              |
| Width (mm)                     | 260 mm              |
| Depth (mm)                     | 75 mm               |

# Technical Information

|                         |                           |
|-------------------------|---------------------------|
| <b>Wattage</b>          | 7W - 13W                  |
| <b>Lumens Delivered</b> | 920lm - 1600lm (4000K)    |
| <b>Lm/W</b>             | 130lm/W - 125lm/W (4000K) |
| <b>Beam Angle</b>       | 115                       |
| <b>CRI</b>              | 80                        |
| <b>CCT</b>              | 3000/4000K                |
| <b>Input</b>            | 220/240V                  |
| <b>Hertz</b>            | 50/60Hz                   |
| <b>Operating Temp</b>   | -10°C to 40°C             |
| <b>SDCM</b>             | 6                         |

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:07 AM



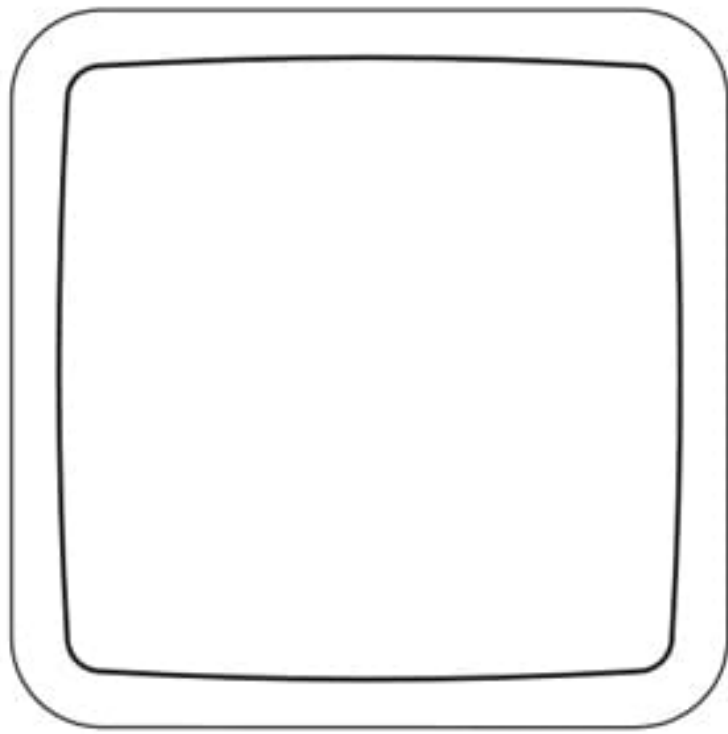

260



75