

AARLEDB/100

Arco Bollard 1000mm Cool White



Features

Ultra modern LED bollard suitable for residential and hospitality applications

Graphite textured powder coated paint finish

Flange mounted base for surface mounting

Available in 3000K and 4000K options

Non-dimmable



Belfast: +44 (0) 2890 773750


General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP54
IK Rating	IK07
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 36,000h
Warranty (Years)	3
CE Mark	Yes
Width (mm)	171 mm
Height (mm)	1,000 mm
Depth (mm)	138 mm

Technical Information

Wattage 11W Lumens Delivered 640 lm Lm/W 58 lm/W Beam Angle 60/90 CRI 80 CCT 4000 K Input 100/240V Hertz 50/60 Hz Operating Temp -20°C to 45°C SDCM 6		
Lm/W 58lm/W Beam Angle 60/90 CRI 80 CCT 4000K Input 100/240V Hertz 50/60Hz Operating Temp -20°C to 45°C	Wattage	11W
Beam Angle 60/90 CRI 80 CCT 4000K Input 100/240V Hertz 50/60Hz Operating Temp -20°C to 45°C	Lumens Delivered	640lm
CRI 80 CCT 4000K Input 100/240V Hertz 50/60Hz Operating Temp -20°C to 45°C	Lm/W	58lm/W
CCT 4000K Input 100/240V Hertz 50/60Hz Operating Temp -20°C to 45°C	Beam Angle	60/90
Input	CRI	80
Hertz 50/60Hz Operating Temp -20°C to 45°C	ССТ	4000K
Operating Temp -20°C to 45°C	Input	100/240V
	Hertz	50/60Hz
SDCM 6	Operating Temp	-20°C to 45°C
	SDCM	6



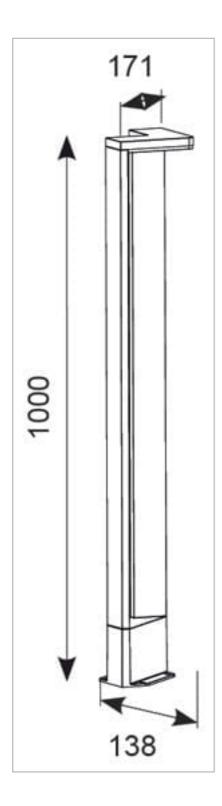

Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:27:09 AM

Belfast: +44 (0) 2890 773750