



## **ABRLEDB/650/WW**

Brock Bollard Warm White



### **Features**

Modern bi-directional bollard providing vivid angled light distribution suitable for residential and hospitality applications

Die-cast aluminium body with a graphite powder coated paint finish for enhanced durability

Supplied c/w root mounting kit

Available in 3000K and 4000K options


Non-dimmable

## General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L80 66,000h
Warranty (Years)	5
CE Mark	Yes
Width (mm)	150 mm
Height (mm)	656 mm
Depth (mm)	45 mm

## Technical Information

Wattage	7.7W
Lumens Delivered	450lm
Lm/W	57lm/W
Beam Angle	50
CRI	80
CCT	3000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-20°C to 25°C
SDCM	3

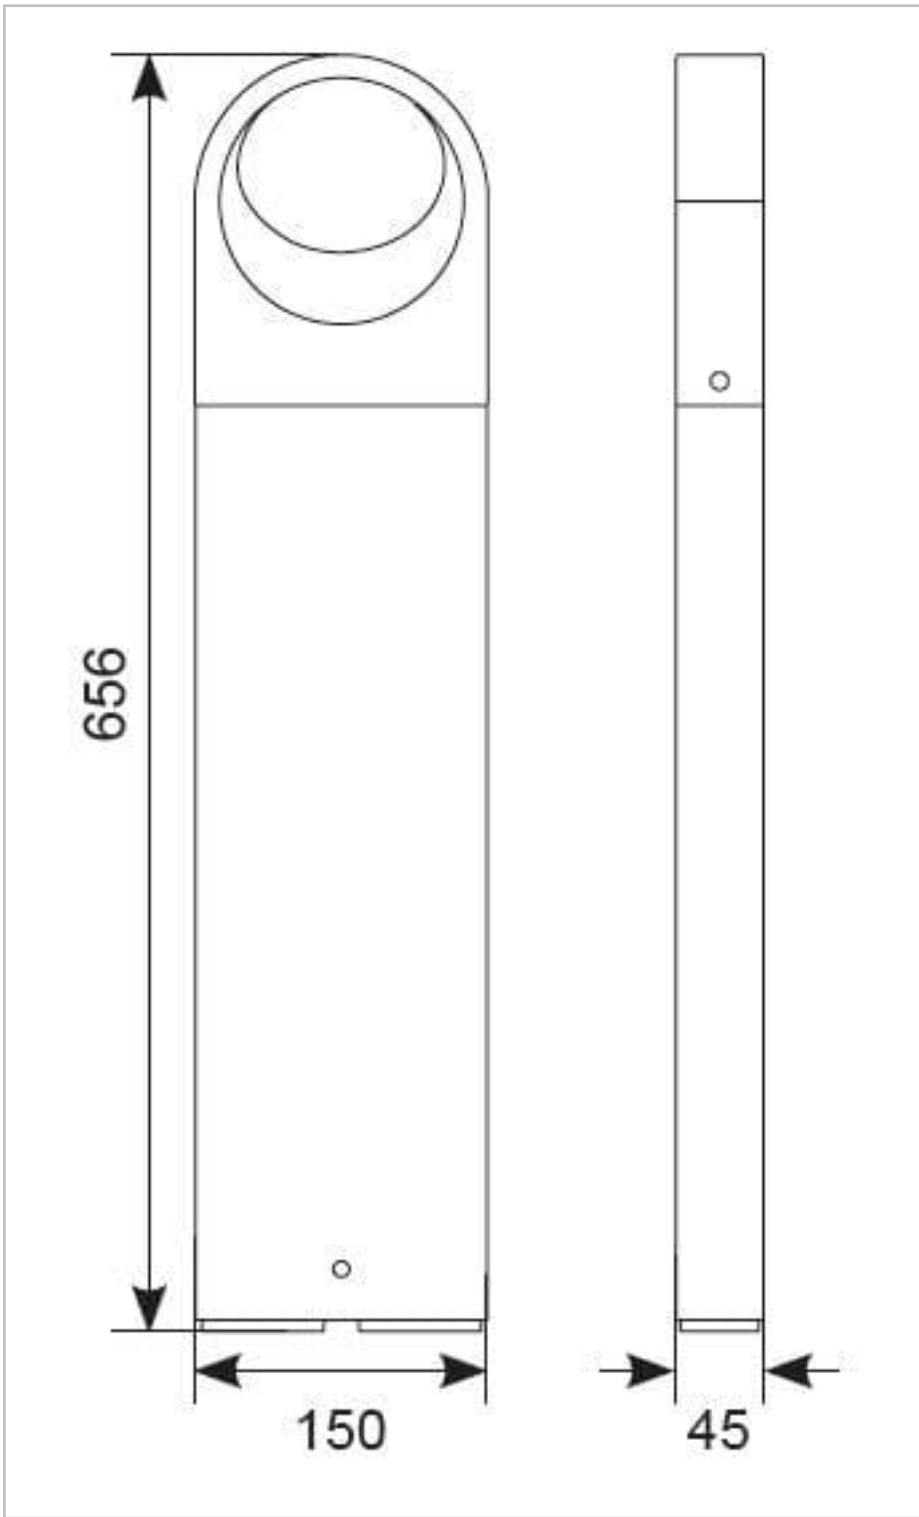

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:09 AM