

## Calinor EVO Floodlight Cool White 20W Black



- Compact, slim and robust designed LED floodlight suitable for residential and commercial applications
- Polycarbonate front trim provides excellent corrosion resistance
- Toughened microprism glass for visual comfort, uniformity and durability
- Bracket design allows installation without removing mounting bracket
- Pre-wired with 1 metre of rubber insulated cable for ease of installation and easy integration with Floodbox accessory
- Breather gland acts to minimise risk of water ingress
- Polycarbonate spike accessory allowing installation into lawn and garden applications
- PIR versions complete with manual override facility
- Non-dimmable

Feature 1 Compact, slim and robust designed LED floodlight suitable for residential and commercial applications

Feature 2 Polycarbonate front trim provides excellent corrosion resistance

Feature 3 Toughened microprism glass for visual comfort, uniformity and durability

Feature 4 Bracket design allows installation without removing mounting bracket





Feature 5 Pre-wired with 1 metre of rubber insulated cable for ease of installation

and easy integration with Floodbox accessory

Feature 6 Breather gland acts to minimise risk of water ingress

Feature 7 Polycarbonate spike accessory allowing installation into lawn and

garden applications

Feature 8 PIR versions complete with manual override facility

Feature 9 Non-dimmable

**General Information** 

Lamp Type LED IP Rating IP65 IK Rating IK06

Class Protection 1

Internal / External External
Surface / Recessed / Suspended Surface

Warranty (Years) 5

Material Aluminium, Polycarbonate

**Technical Information** 

Wattage 20W

Lumens Delivered 2200lm
Lm/W 112lm/W

Beam Angle 100

CRI 80

CCT 4000K


Input 220/240V Hertz 50/60Hz

Operating Temp -15°C - 40°C

Lumen Depreciation L80 69,000h

Power Factor 0.5



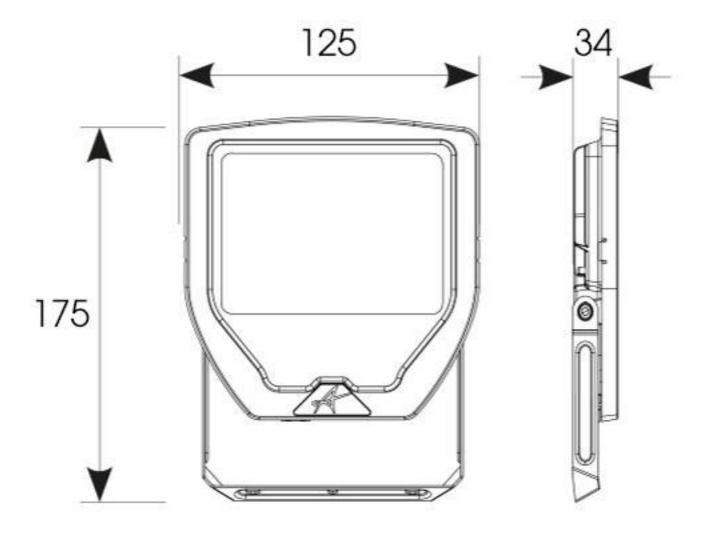

A