

Calinor EVO Floodlight Cool White 30W Black



- Compact, slim and robust designed LED floodlight suitable for residential and commercial applications
- Polycarbonate front trim provides excellent corrosion resistance
- Toughened microprism glass for visual comfort, uniformity and durability
- Bracket design allows installation without removing mounting bracket
- Pre-wired with 1 metre of rubber insulated cable for ease of installation and easy integration with Floodbox accessory
- Breather gland acts to minimise risk of water ingress
- Polycarbonate spike accessory allowing installation into lawn and garden applications
- PIR versions complete with manual override facility
- Non-dimmable

Feature 3

www.anselluk.com

Feature 1 Compact, slim and robust designed LED floodlight suitable for residential and commercial applications

Feature 2 Polycarbonate front trim provides excellent corrosion resistance

Feature 4 Bracket design allows installation without removing mounting bracket

Toughened microprism glass for visual comfort, uniformity and durability

Belfast: +44 (0) 2890 773750

Warrington: +44 (0) 1942 433333





Feature 5 Pre-wired with 1 metre of rubber insulated cable for ease of installation

and easy integration with Floodbox accessory

Feature 6 Breather gland acts to minimise risk of water ingress

Feature 7 Polycarbonate spike accessory allowing installation into lawn and

garden applications

Feature 8 PIR versions complete with manual override facility

Feature 9 Non-dimmable

General Information

Lamp Type LED
IP Rating IP65
IK Rating IK06

Class Protection 1

Internal / External External
Surface / Recessed / Suspended Surface

Warranty (Years) 5

Material Aluminium, Polycarbonate

Technical Information

Wattage 30W

Lumens Delivered 3300lm Lm/W 110lm/w

 Beam Angle
 100

 CRI
 80


 CCT
 4000K

Input 220/240V Hertz 50/60Hz

Operating Temp -15°C - 40°C Lumen Depreciation L80 69,000h

Power Factor 0.9



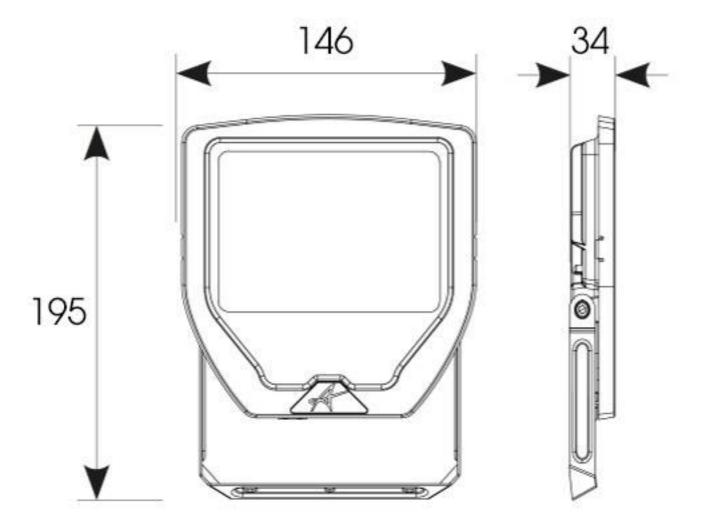

A