



ADLED2/BV/CCT/CF

Delta CCT 2 Corridor Function Black



Features

All polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

General Information


| | |
|---------------------------------------|--|
| Lamp Type | LED |
| Colour / Finish | Black / Visiluxe |
| Dimmable | Yes |
| Integral Microwave Sensor | Yes |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Class Protection | 2 |
| Internal / External | Internal / External |
| Surface / Recessed / Suspended | Surface |
| Lifetime (Hrs) | L70 B50 60,000h |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter (mm) | 294 mm |
| Depth (mm) | 73 mm |
| Accessories | ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W |

Technical Information


| | |
|-------------------------|---------------------------|
| Wattage | 7W - 13W |
| Lumens Delivered | 940lm - 1600lm (4000K) |
| Lm/W | 135lm/W - 125lm/W (4000K) |
| Beam Angle | 115 |
| CRI | 80 |
| CCT | 3000/4000K |
| Input | 220/240V |
| Hertz | 50/60Hz |
| Operating Temp | -10°C to 40°C |
| SDCM | 6 |

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:02:45 PM



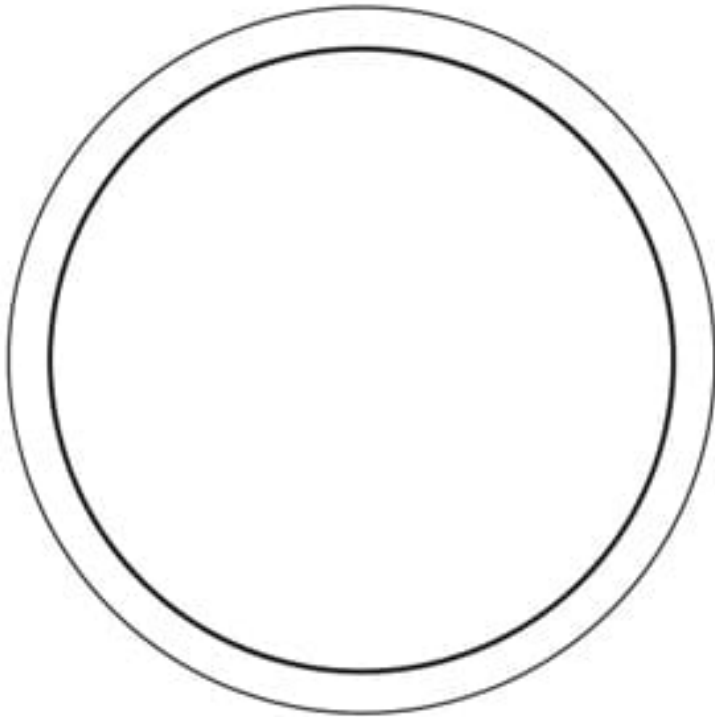

260

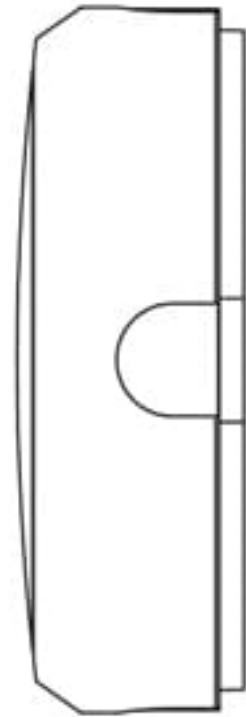

65