



## **ADLED2/BV/CCT/MWS/M3**

Delta CCT 2 Microwave Sensor Emergency Black



### **Features**

All polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

## General Information


<b>Lamp Type</b>	LED
<b>Colour / Finish</b>	Black / Visiluxe
<b>Emergency</b>	Yes
<b>Integral Microwave Sensor</b>	Yes
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08
<b>Class Protection</b>	2
<b>Internal / External</b>	Internal / External
<b>Surface / Recessed / Suspended</b>	Surface
<b>Lifetime (Hrs)</b>	L70 B50 60,000h
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Diameter (mm)</b>	294 mm
<b>Depth (mm)</b>	73 mm
<b>Accessories</b>	ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W

# Technical Information


<b>Wattage</b>	7W - 13W
<b>Lumens Delivered</b>	940lm - 1600lm (4000K)
<b>Lm/W</b>	135lm/W - 125lm/W (4000K)
<b>Beam Angle</b>	115
<b>CRI</b>	80
<b>CCT</b>	3000/4000K
<b>Input</b>	220/240V
<b>Hertz</b>	50/60Hz
<b>Operating Temp</b>	5°C to 40°C
<b>SDCM</b>	6

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:08 AM



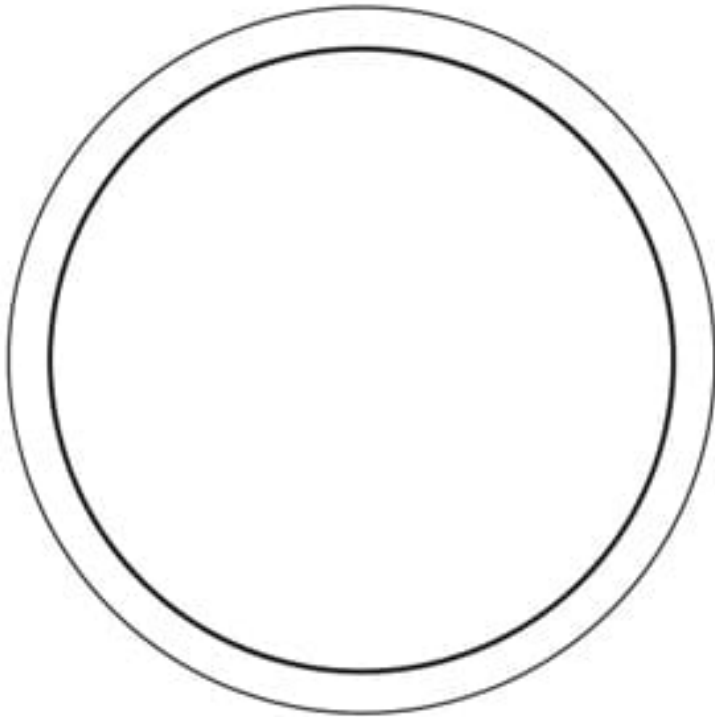

260

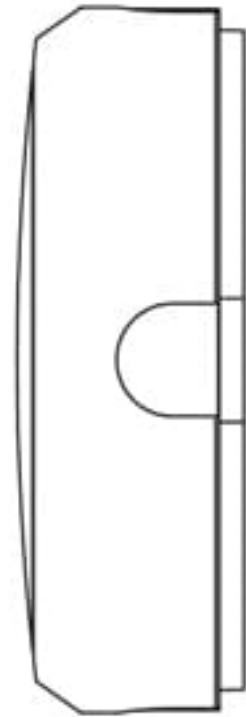

65