



## **ADLED2/BV/CCT/PC**

Delta CCT 2 Photocell Black



## **Features**

All polycarbonate multi-purpose LED round bulkhead suitable for ancillary areas and industrial applications

Push fit feed-in, feed-out terminals for speed and ease of installation

Internal CCT selector switch allows the installer to choose the CCT between 3000K and 4000K

Supplied c/w optional trim attachment which provides a more commercially aesthetic appearance

Unique Visiluxe diffuser allows 90% light transmission from LED source for increased performance

Instant light output and unlimited switching

# General Information


Lamp Type	LED
Colour / Finish	Black / Visiluxe
Photocell	Yes
IP Rating	IP65
IK Rating	IK08
Class Protection	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L80 B50 60,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	294 mm
Depth (mm)	73 mm
Accessories	ADLED2/BZ/EYE/B, ADLED2/BZ/EYE/W, ADLED2/BZ/GRILL/B, ADLED2/BZ/GRILL/W

# Technical Information


<b>Wattage</b>	7W - 13W
<b>Lumens Delivered</b>	940lm - 1600lm (4000K)
<b>Lm/W</b>	135lm/W - 125lm/W (4000K)
<b>Beam Angle</b>	115
<b>CRI</b>	80
<b>CCT</b>	3000/4000K
<b>Input</b>	220/240V
<b>Hertz</b>	50/60Hz
<b>Operating Temp</b>	-10°C to 25°C
<b>SDCM</b>	6

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:08 AM



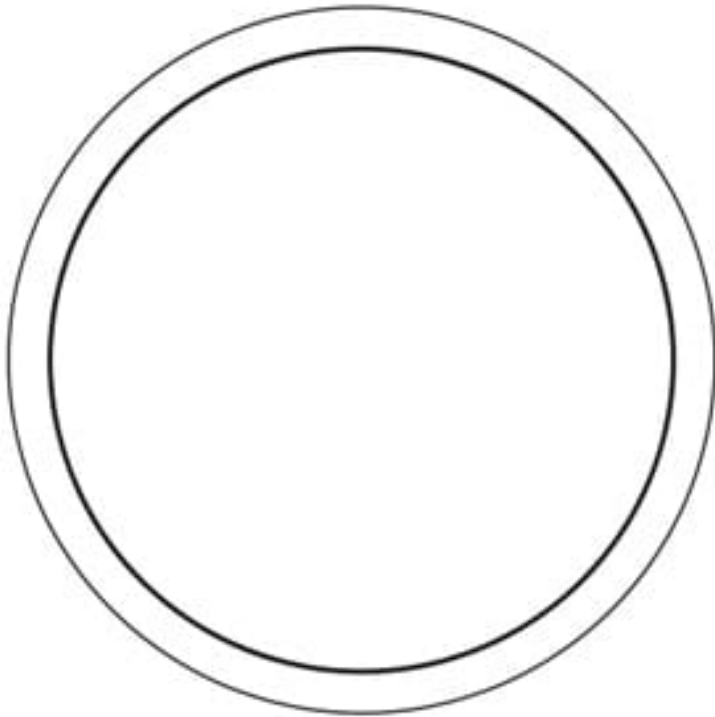

260

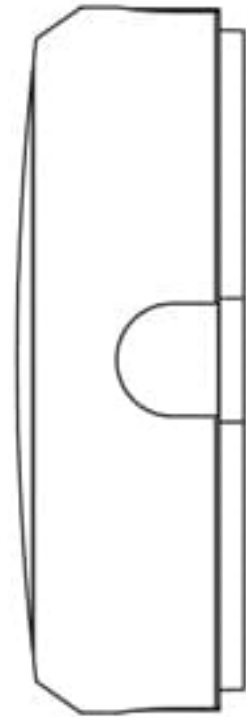

65