



## **AECLED/SC/CCT**

Eclipse MultiLED CCT Satin Chrome



## **Features**

LED wall/ceiling luminaire with adjustable power and light output option suitable for education and commercial applications and ancillary areas

One product with integral driver dip-switch

Internal CCT selector switch allows the installer to choose the CCT between 3000K, 4000K and 6500K

Corridor function options available for effective reduction in energy consumption

Spun aluminium base with dished opal Visiluxe diffuser

BESA box fixing versatile mounting options


Option of white, chrome or satin chrome housing

## General Information

Lamp Type	LED
Colour / Finish	Satin Chrome
Bluetooth Enabled	Yes
IP Rating	IP20
IK Rating	IK08
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	435 mm
Depth (mm)	100 mm

## Technical Information

Wattage	11W - 25W
Lumens Delivered	1200lm - 2800lm (4000K)
Lm/W	108lm/W - 114lm/W (4000K)
Beam Angle	110
CRI	80
CCT	3000/4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-10°C to 25°C
SDCM	6

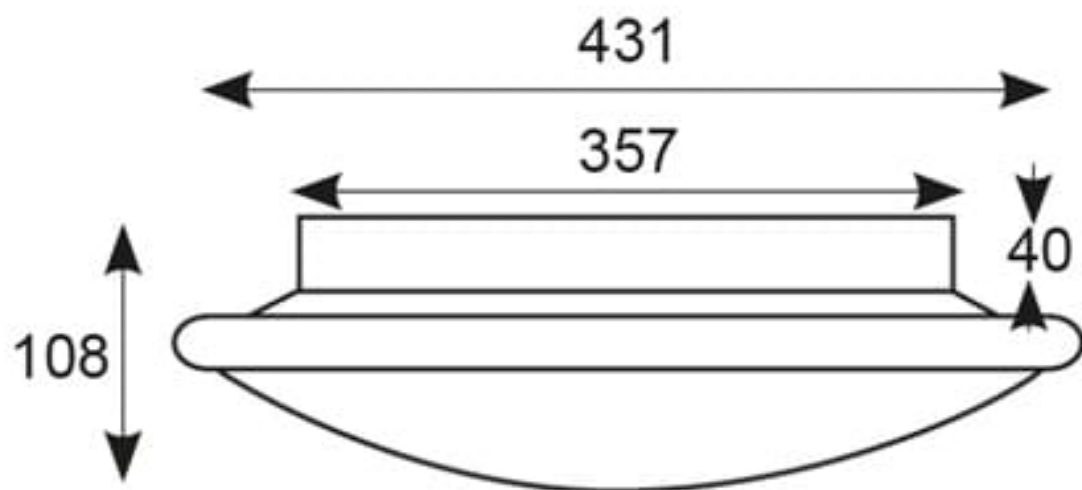

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:07 AM