

AHELED/OW/PIR

Helder CCT Oval Bulkhead White PIR



Features

All polycarbonate oval bulkhead suitable for external semi-commercial and residential applications

Fast loop-in / loop-out connections

CCT selectable between 3000K, 4000K and 6500K

Body options of black or white

Polycarbonate opal diffuser

Non-dimmable



Belfast: +44 (0) 2890 773750

General Information


| Colour / Finish White IP Rating IP54 Class Protection 2 Internal / External Surface / Recessed / Suspended Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | | |
|--|--------------------------------|-----------------|
| IP Rating IP54 Class Protection 2 Internal / External External Surface / Recessed / Suspended Surface Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Lamp Type | LED |
| Class Protection 2 Internal / External External Surface / Recessed / Suspended Surface Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Colour / Finish | White |
| Internal / External Surface / Recessed / Suspended Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Midth (mm) 119 mm | IP Rating | IP54 |
| Surface / Recessed / Suspended Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Class Protection | 2 |
| Lifetime (Hrs) L80 B10 54,000h Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Internal / External | External |
| Warranty (Years) 2 CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Surface / Recessed / Suspended | Surface |
| CE Mark Yes Length (mm) 212 mm Width (mm) 119 mm | Lifetime (Hrs) | L80 B10 54,000h |
| Length (mm) 212 mm Width (mm) 119 mm | Warranty (Years) | 2 |
| Width (mm) 119 mm | CE Mark | Yes |
| | Length (mm) | 212 mm |
| Depth (mm) 60.5 mm | Width (mm) | 119 mm |
| | Depth (mm) | 60.5 mm |

Technical Information

| Lumens Delivered 1100lm (4000K) Lm/W 96lm/W (4000K) Beam Angle 110 CRI 80 CCT 3000/4000/6000K Input 220/240V Hertz 50/60Hz Operating Temp -5°C to 25°C | | |
|--|------------------|-----------------|
| Departing Temp Solid Sol | Wattage | 12W |
| Beam Angle 110 CRI 80 CCT 3000/4000/6000K Input 220/240V Hertz 50/60Hz Operating Temp -5°C to 25°C | Lumens Delivered | 1100lm (4000K) |
| 80 3000/4000/6000K 10put 220/240V 10put 50/60Hz 10put -5°C to 25°C 10put | Lm/W | 96lm/W (4000K) |
| 3000/4000/6000K 3000/4000/6000K 220/240V 4 4 4 4 4 4 4 4 4 | Beam Angle | 110 |
| | CRI | 80 |
| Hertz 50/60Hz Operating Temp -5°C to 25°C | ССТ | 3000/4000/6000K |
| Operating Temp -5°C to 25°C | Input | 220/240V |
| | Hertz | 50/60Hz |
| SDCM 6 | Operating Temp | -5°C to 25°C |
| | SDCM | 6 |

Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:27:09 AM



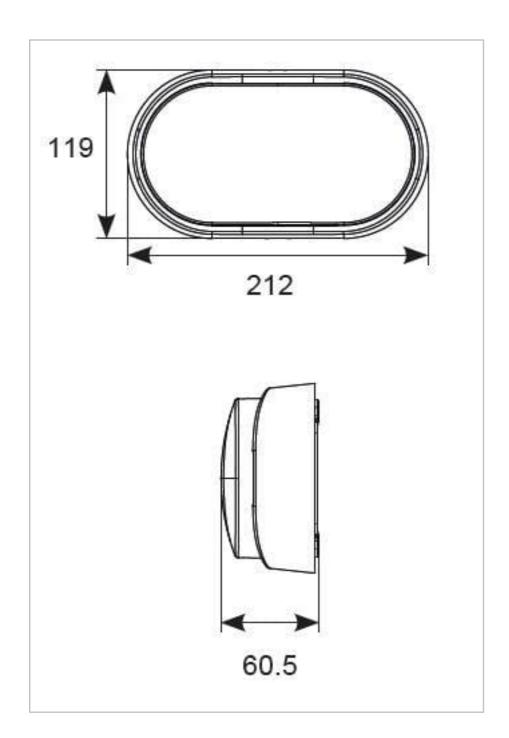

Belfast: +44 (0) 2890 773750