



ALWPLED

Lynx Wallpack Black



Features

Robust wall mounted luminaire for general accent illumination and suitable for education, commercial, industrial applications

Integral emergency option provides downward illumination with a beam angle of 60°

Die-cast aluminium body with vandal resistant polycarbonate Fresnel lens diffuser

Tamper-proof allen key screws supplied as standard

Multiple conduit entry and BESA box fixing points

Photocell and sensor options


Powered by Tridonic

General Information

Lamp Type	LED
Colour / Finish	Black
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L70 B50 60,000h
Warranty (Years)	5
CE Mark	Yes
Width (mm)	264 mm
Height (mm)	300 mm
Depth (mm)	120 mm

Technical Information

Wattage	29W
Lumens Delivered	2000lm
Lm/W	71lm/W
Beam Angle	25/75
CRI	80
CCT	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	0°C to 25°C
SDCM	6

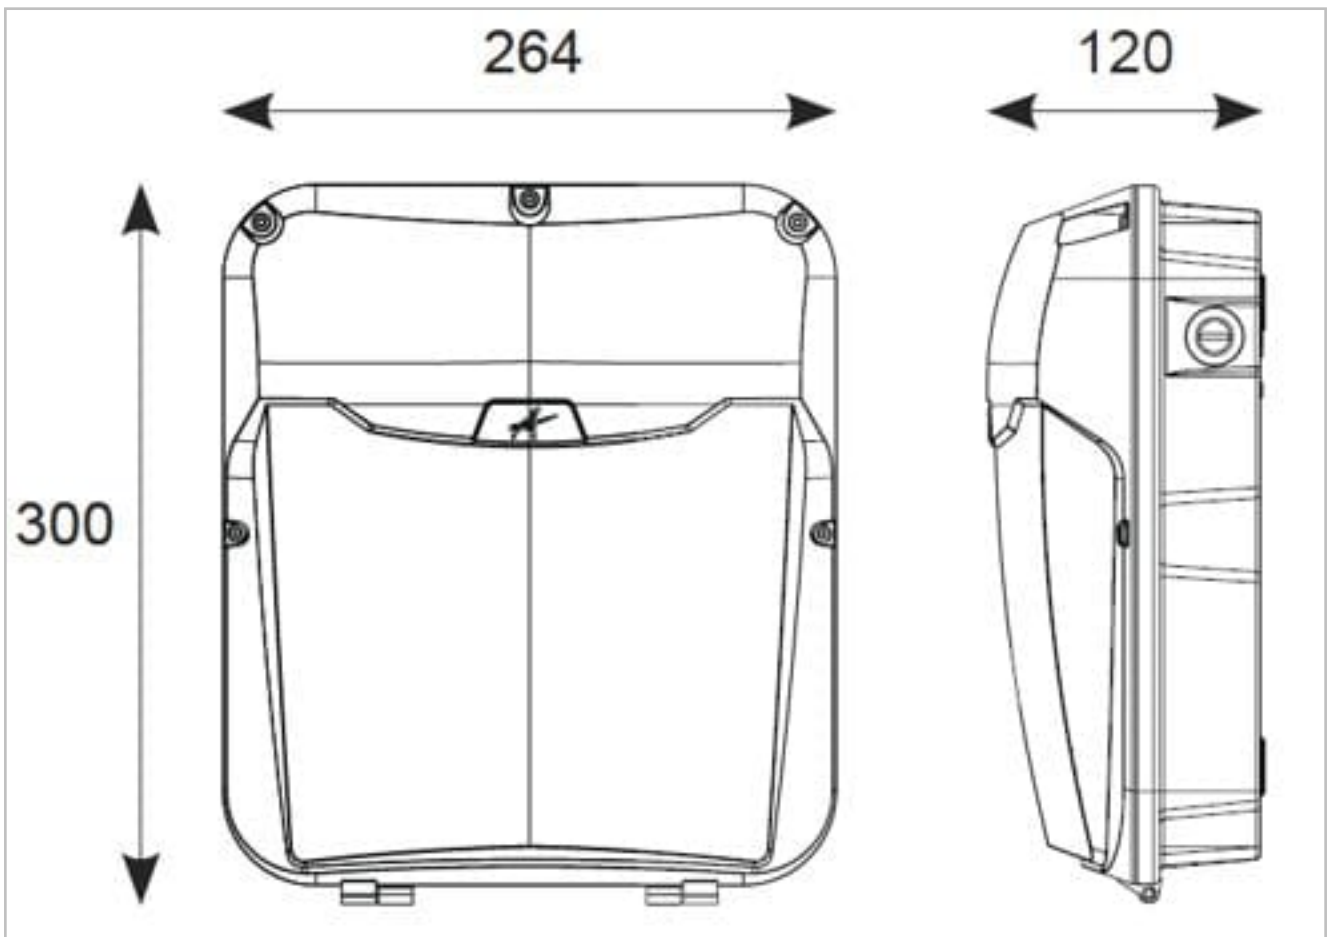

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:11 AM