



## **AMELED/ER/3NM/ST/B**

Merlin Emergency Downlight Non-Maintained Escape Route Black



## **Features**

Ultra-low profile recessed self-test emergency downlight

Option of escape route or open area models

High specification optic design and performance allows increased spacing providing reduced cost

Available in black and white finishes

Self-test as standard


Up to 17.8 metres spacing between luminaires

## General Information

Lamp Type	LED
Colour / Finish	Black
Emergency	Yes
Self Test	Yes
IP Rating	IP20
IK Rating	IK08
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	85 mm
Height (mm)	63 mm
Accessories	ASBP/9/LI

# Technical Information

Wattage	5W
Lumens Delivered	235lm (Emergency)
Beam Angle	15/135
CRI	70
CCT	6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	0°C to 40°C
SDCM	6

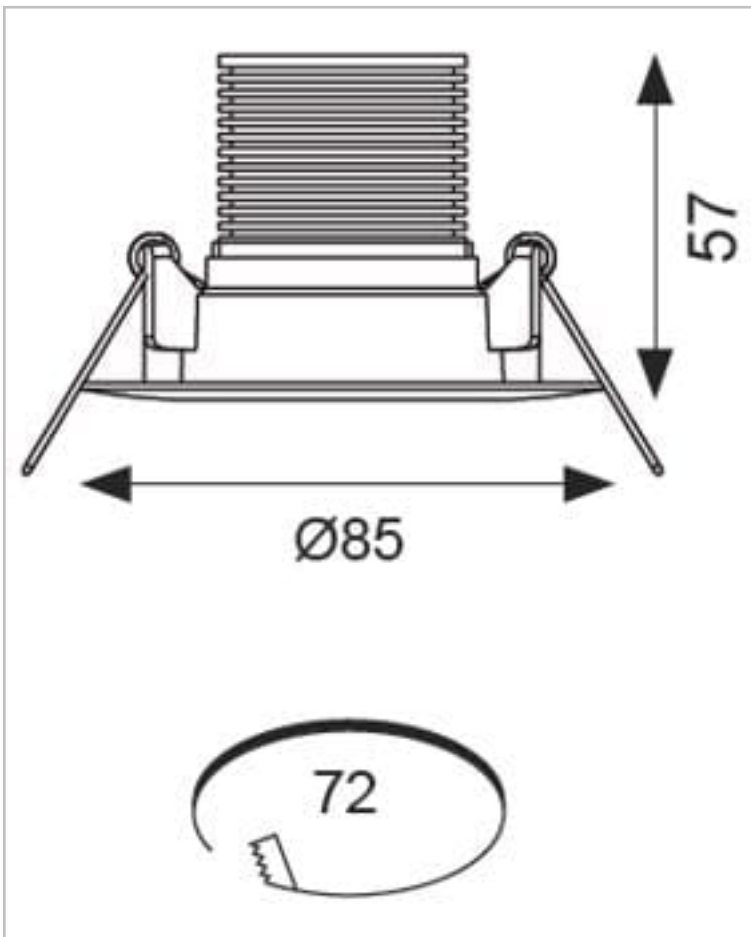

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:02 AM