



## **AMELED/OA/3NM/ST**

Merlin Emergency Downlight Non-Maintained Open Area White



## **Features**

Ultra-low profile recessed self-test emergency downlight

Option of escape route or open area models

High specification optic design and performance allows increased spacing providing reduced cost

Available in black and white finishes

Self-test as standard


Up to 17.8 metres spacing between luminaires

## General Information

<b>Lamp Type</b>	LED
<b>Colour / Finish</b>	White
<b>Emergency</b>	Yes
<b>Self Test</b>	Yes
<b>IP Rating</b>	IP20
<b>IK Rating</b>	IK08
<b>Class Protection</b>	1
<b>Internal / External</b>	Internal
<b>Surface / Recessed / Suspended</b>	Recessed
<b>Lifetime (Hrs)</b>	L70 50,000h
<b>Warranty (Years)</b>	5
<b>CE Mark</b>	Yes
<b>Diameter (mm)</b>	85 mm
<b>Height (mm)</b>	63 mm
<b>Accessories</b>	ASBP/9/LI

# Technical Information

Wattage	5W
Lumens Delivered	274lm (Emergency)
Beam Angle	110
CRI	70
CCT	6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	0°C to 40°C
SDCM	6

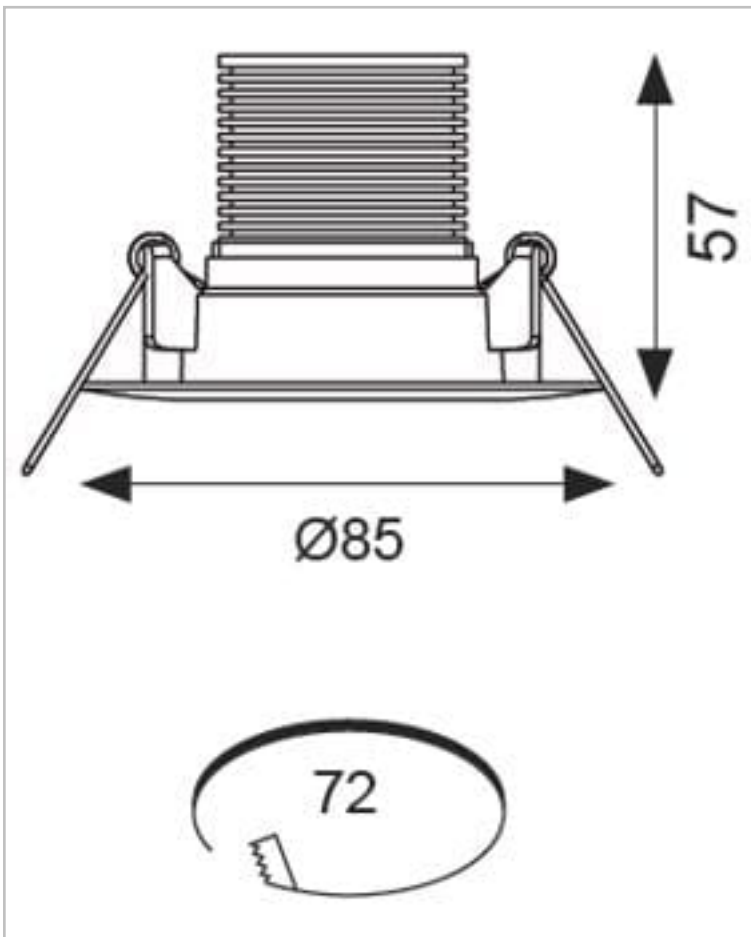

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:02 AM