



AMERLED/HP/DD/MWS/M3

Mercury HP LED - Digital Dimming Integral Microwave Sensor Emergency - 33W Matt White



Features

IP44 polycarbonate wall/ceiling light for corridors, stairwells and general amenity applications

High output option allows for a range of installation applications

LED performance significantly exceeds CFL equivalents

BESA box fixing facility

Integral laminated board heatsink provides high performance thermal management

Digital dimming, self-test emergency, DALI emergency and microwave sensor options

LED lifespan L70 56,000 hours

General Information


Lamp Type	LED
Colour / Finish	Matt White
Dimmable	Yes
Emergency	Yes
Integral Microwave Sensor	Yes
IP Rating	IP44
Class Protection	1
Bathroom Zone	2
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	450
Depth (mm)	84
Accessories	AMERLEDBZ/CH

Technical Information

Wattage	33W
Lumens Delivered	2702lm
Lm/W	82lm
CRI	Ra 80
CCT	4000k
Input	230V
Hertz	50/60Hz
Operating Temp	-10°C to 40°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Material housing	Plastic
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
Degree of protection (IP)	IP44
Protection class	I
Suitable for emergency lighting	Yes
With movement sensor	Yes
With light sensor	No
Max. system power	33 W
Rated luminous flux acc. IEC 62722-2-1	2702 lm
Colour of light	White
Colour temperature	3500-3500 K
Colour rendering index CRI	80-89
Luminaire efficacy	82 lm/W
Height/depth	84 mm
Length	450 mm

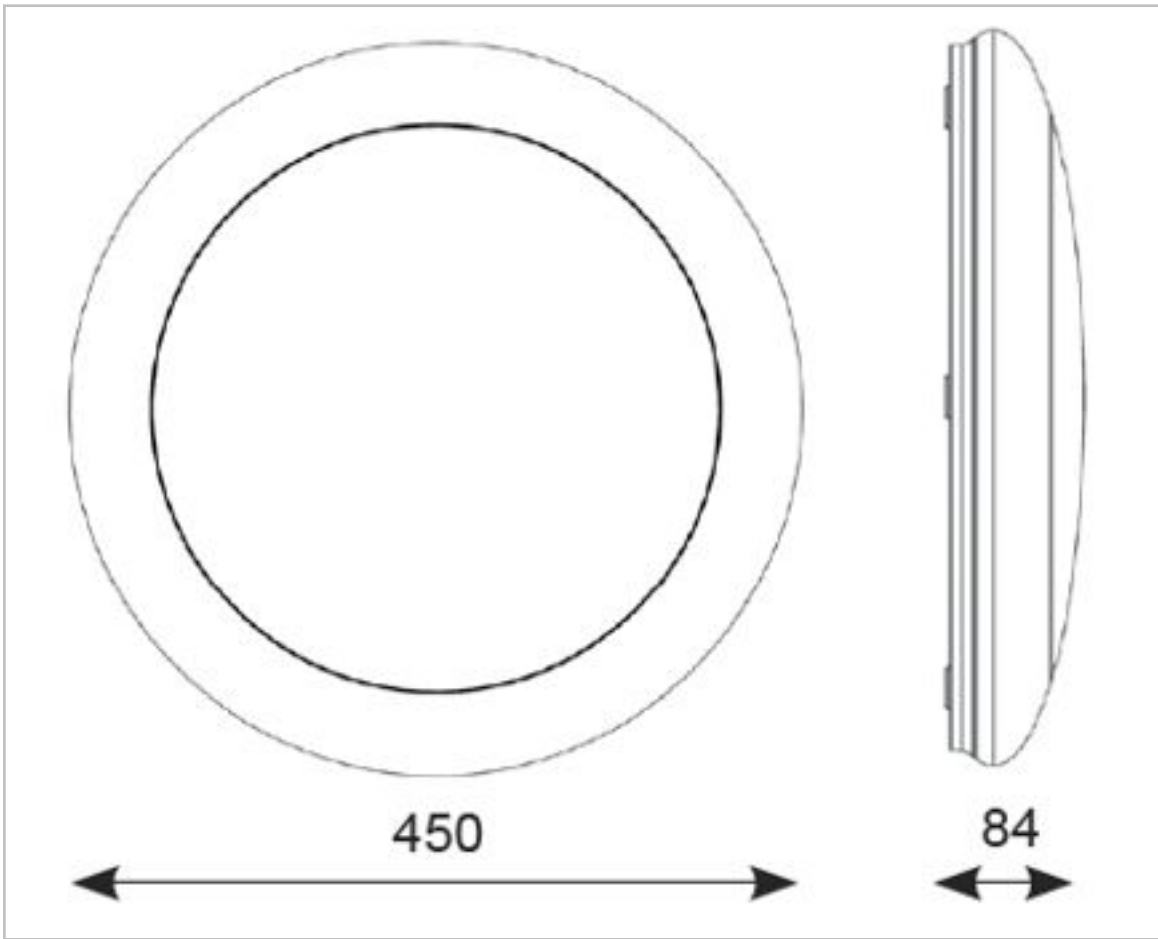

Datasheet generated from <https://onetimepim.com> last updated Tuesday, December 1, 2020 9:48:34 AM