



APILLED/GR

Pi CCT Low Level Graphite



Features

Modern surface mounted ultra-slim low level light with downward light spill suitable for residential and hospitality applications

Die-cast aluminium construction with choice of white or graphite paint finish

Push fit loop-in loop-out terminals for ease of installation

Anti-glare toughened tempered opal glass front diffuser

CCT selectable between 3000K and 4000K

Screwless front cover with concealed allen key access provides security and a sleek design

Non-dimmable


General Information

Lamp Type	LED
Colour / Finish	Graphite
IP Rating	IP65
IK Rating	IK06
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Lifetime (Hrs)	L80 B50 60,000h
Warranty (Years)	3
CE Mark	Yes
Diameter (mm)	100 mm
Depth (mm)	50 mm


Technical Information

Wattage	2.5W
Lumens Delivered	60lm (4000K)
Lm/W	25lm/W (4000K)
Beam Angle	20/60
CRI	80
CCT	3000/4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	0°C to 25°C
SDCM	3

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:05 AM

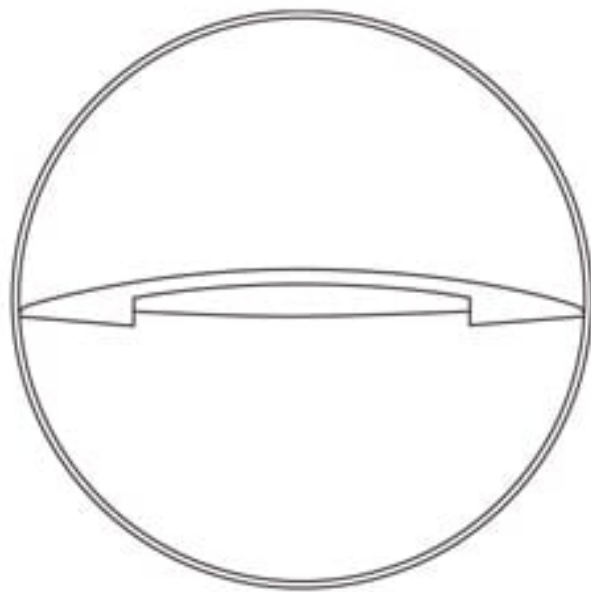

Ø100

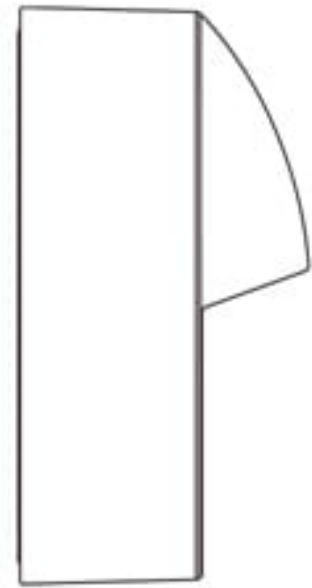

50