



ARALED/ER/3NM/ST

Raven Emergency Downlight Non-Maintained Escape Route White



Features

Recessed Self-test emergency downlight with self-contained inverter and battery pack

Integral components for fast-fit installation

Option of escape route or open area models

High performance optic design

Pre-wired with 150mm rubber insulated cable for ease of installation


Up to 15 metres spacing between luminaires

General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
Minimum Recharge Period	24 hours
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	110 mm
Height (mm)	98 mm
Accessories	ASBP/14/LI

Technical Information

Wattage	3W
Lumens Delivered	110lm (Emergency)
Beam Angle	30/140
CRI	70
CCT	6500K
Input	220/240V
Hertz	50/60Hz
Operating Temp	0°C to 40°C
SDCM	6

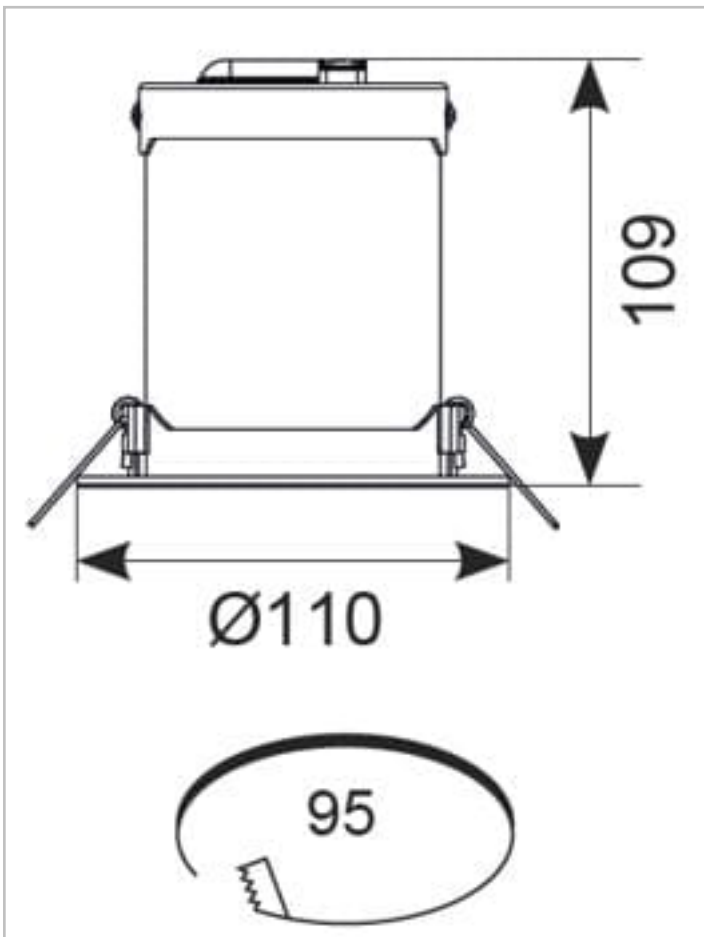

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 6, 2022 8:27:02 AM