



## ASPRLED/LI/3M/DA

Signal Pro Emergency Downlight Non-Maintained



## Features

LiFePO4 Lithium battery provides enhanced product lifetime

Supplied with open area and escape route interchangeable lenses

High specification optic design and performance allows increased spacing providing reduced cost

DALI emergency as standard

70mm to 120mm cut-out


If not connected to DALI network Self-test mode operates automatically

## General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 72,000h
Warranty (Years)	6
CE Mark	Yes
Diameter (mm)	84 mm
Height (mm)	35 mm
Accessories	ASBP/19

## Technical Information

Wattage	2.5W
Lumens Delivered	209lm (Open Area), 201lm (Escape Route)
Beam Angle	144° (Open Area), 143° x 120° (Escape Route)
CRI	70
CCT	6000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	5°C to 40°C
SDCM	5

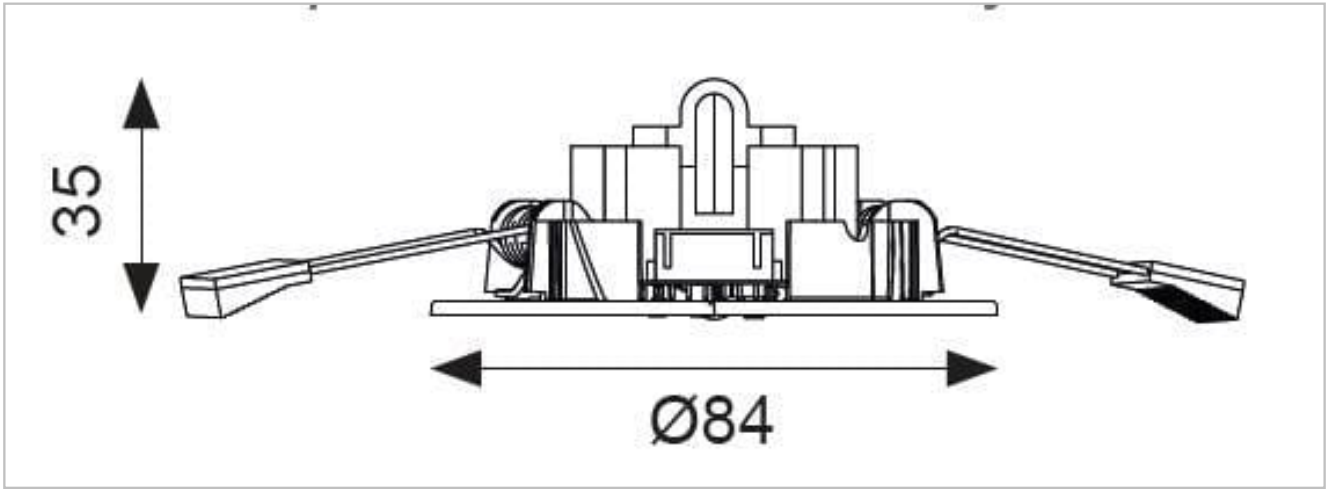

Datasheet generated from <https://onetimepim.com> last updated Thursday, November 3, 2022 11:00:30 PM