

AULED100WW

Unity 100 Wallwash Cool White



Features

Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications

Adjustable tilt angle from -15° to 45°

 $30\ensuremath{^\circ}$ cut-off angle in the horizontal position

Die-cast aluminium body and heatsink for good thermal management

Remote driver with plug and play connection

Dimmable options

Powered by Tridonic



Belfast: +44 (0) 2890 773750


General Information

Lamp Type	LED
Colour / Finish	White
Bluetooth Enabled	Yes
IP Rating	IP20
IK Rating	IK02
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L70 50,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	112 mm
Height (mm)	88 mm



Technical Information

Wattage	15W
Lumens Delivered	1300lm
Lm/W	84lm/W
Beam Angle	55
CRI	90
ССТ	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-20°C to 25°C
SDCM	3
UGR	17

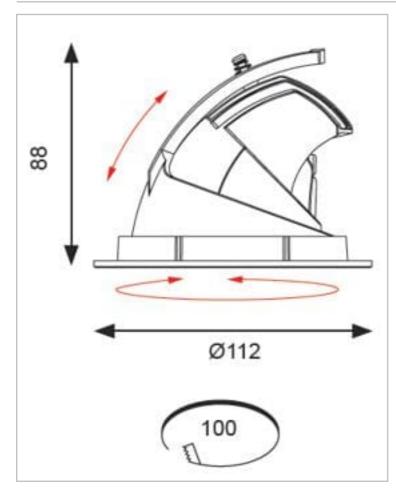



Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:27:00 AM



Belfast: +44 (0) 2890 773750