

AULED150D

Unity 150 Downlight Cool White



Features

IP44 compact high performance architectural downlight suitable for commercial, hospitality and retail applications

Die-cast aluminium construction, powder coated and 30° cut-off angle

Mirror finished anodized reflector

Anti-glare design to create visual comfort

Remote driver with plug and play connection

Dimmable and emergency options

Powered by Tridonic



Belfast: +44 (0) 2890 773750

General Information


Lamp Type	LED
Colour / Finish	White
Bluetooth Enabled	Yes
IP Rating	IP44
IK Rating	IK02
Class Protection	2
Bathroom Zone	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 60,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	165 mm
Height (mm)	137 mm



Belfast: +44 (0) 2890 773750

Technical Information

Wattage 37W Lumens Delivered 3200lm Lm/W 88lm/W Beam Angle 70 CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3 UGR 22		
Lm/W 88Im/W Beam Angle 70 CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Wattage	37W
Beam Angle 70	Lumens Delivered	3200lm
CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Lm/W	88lm/W
CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Beam Angle	70
Input 220/240V	CRI	90
Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	ССТ	4000K
Operating Temp -20°C to 25°C SDCM 3		220/240V
SDCM 3	Hertz	50/60Hz
	Operating Temp	-20°C to 25°C
UGR 22	SDCM	3
	UGR	22

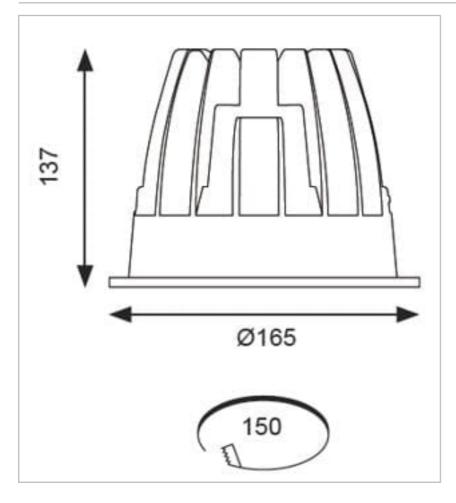



Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:26:59 AM



Belfast: +44 (0) 2890 773750