

AULED150WW

Unity 150 Wallwash Cool White



Features

Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications

Adjustable tilt angle from -15° to 45°

 $30\ensuremath{^\circ}$ cut-off angle in the horizontal position

Die-cast aluminium body and heatsink for good thermal management

Remote driver with plug and play connection

Dimmable options

Powered by Tridonic



Belfast: +44 (0) 2890 773750

General Information


Lamp Type	LED
Colour / Finish	White
Bluetooth Enabled	Yes
IP Rating	IP20
IK Rating	IK02
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 60,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	162 mm
Height (mm)	138 mm



Belfast: +44 (0) 2890 773750

Technical Information

Wattage 28W Lumens Delivered 2700lm Lm/W 93lm/W Beam Angle 55 CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3 UGR 16		
Lm/W 93lm/W	Wattage	28W
Beam Angle 55 CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Lumens Delivered	2700lm
CRI 90 CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Lm/W	93lm/W
CCT 4000K Input 220/240V Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	Beam Angle	55
Input 220/240V	CRI	90
Hertz 50/60Hz Operating Temp -20°C to 25°C SDCM 3	ССТ	4000K
Operating Temp -20°C to 25°C SDCM 3	Input	220/240V
SDCM 3	Hertz	50/60Hz
	Operating Temp	-20°C to 25°C
UGR 16	SDCM	3
	UGR	16

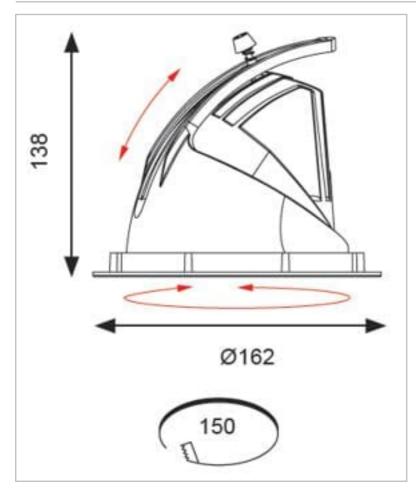



Datasheet generated from https://onetimepim.com last updated Thursday, October 6, 2022 8:27:00 AM



Belfast: +44 (0) 2890 773750