



## AVANTLG1/CW/M3

Vantage UGR<19 1 Cool White Downlight Emergency



## Features

UGR<19 performance downlight suitable for commercial and education applications

Deep cut-off angle for glare control and comfort

UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort

Downlight design allows installation into existing hole cut-outs from 68mm to 100mm


Powered by Tridonic

## General Information

Lamp Type	LED
Emergency	Yes
Bluetooth Enabled	Yes
IP Rating	IP20
Class Protection	2
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Lifetime (Hrs)	L80 72,000h
Warranty (Years)	5
CE Mark	Yes
Diameter (mm)	82 mm
Height (mm)	54 mm

## Technical Information

Wattage	9W
Lumens Delivered	800lm
Lm/W	89lm/W
Beam Angle	40
CRI	90
CCT	4000K
Input	220/240V
Hertz	50/60Hz
Operating Temp	-20°C to 40°C
SDCM	6
UGR	19

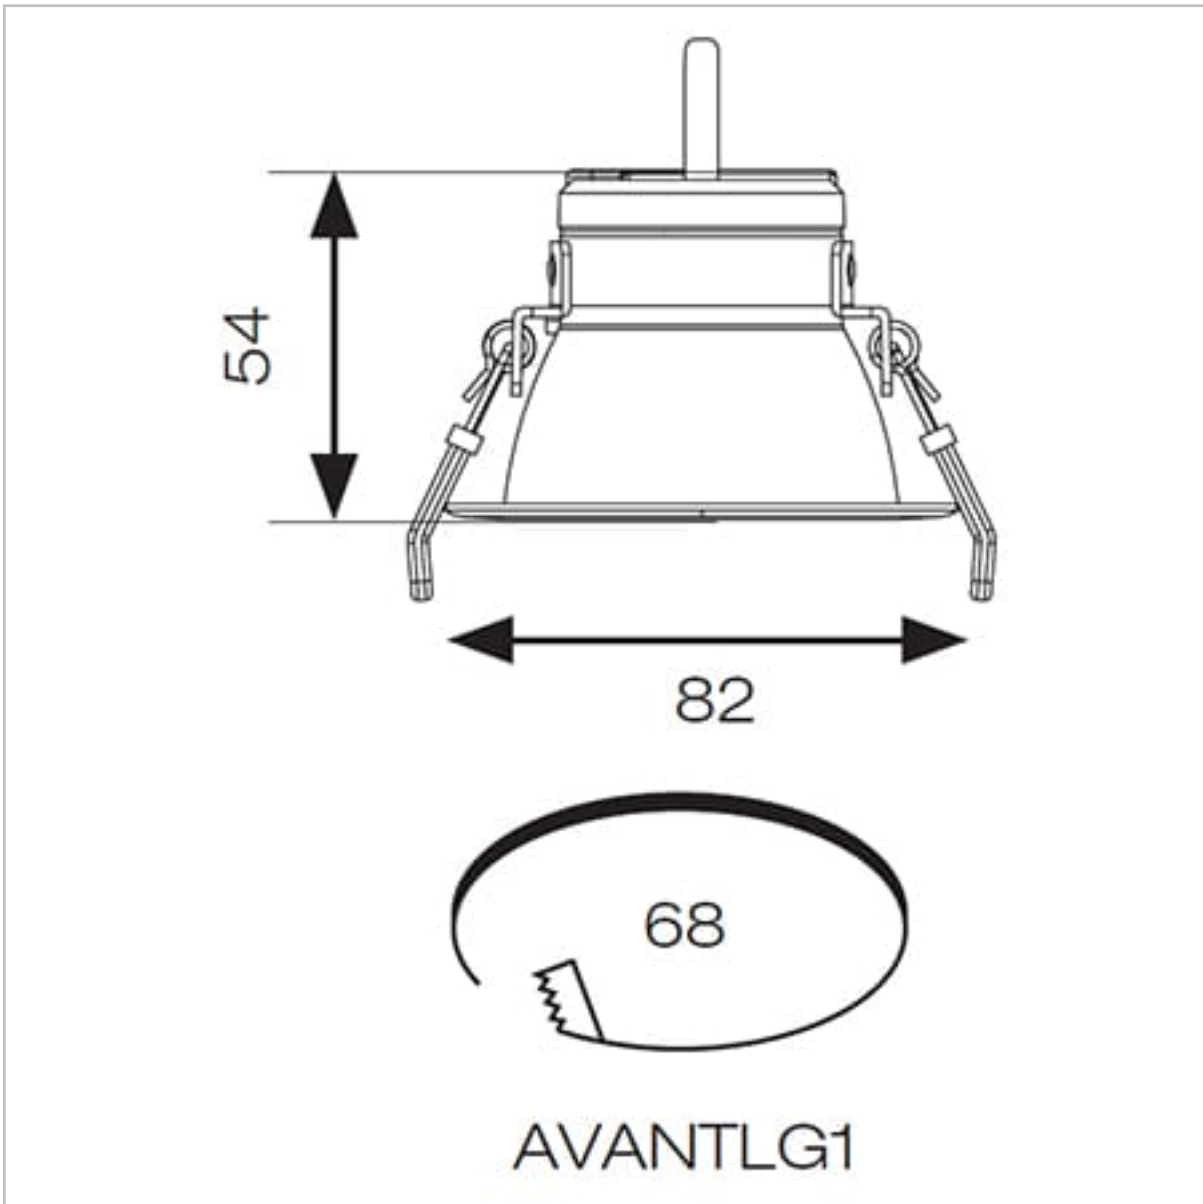

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:01:23 PM