

AZPELED/2/M3

Z LED Performance 2 Cool White Emergency



Features

Robust LED low/high bay for industrial, commercial and retail applications

Die-cast powder coated construction and heatsink for optimum thermals and performance

Alternative installation options by means of drop rods, jack chain and catenary wire

Additional lens options offer mid (85°) and narrow (55°) beam angles; ideal for racking aisles

Bracket accessories available for ceiling or wall mounting

Pre-wired with 3M of H07RN-F cable for ease and speed of installation

1-10V dimmable as standard

General Information



| | |
|---------------------------------------|--------------------------|
| Lamp Type | LED |
| Colour / Finish | Black |
| Dimmable | Yes |
| Emergency | Yes |
| Bluetooth Enabled | Yes |
| IP Rating | IP65 |
| IK Rating | IK08 |
| Class Protection | 1 |
| Internal / External | Internal / External |
| Surface / Recessed / Suspended | Surface,Suspended |
| Lifetime (Hrs) | L80 B10 54,000h |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Diameter (mm) | 321 mm |
| Height (mm) | 180 mm |
| Accessories | AZPELED/FB1, AZPELED/REF |

Technical Information

| | |
|-------------------------|---------------|
| Wattage | 150W |
| Lumens Delivered | 23000lm |
| Lm/W | 150lm/W |
| Beam Angle | 110 |
| CRI | 80 |
| CCT | 4000K |
| Input | 220/240V |
| Hertz | 50/60Hz |
| Operating Temp | -30°C to 45°C |
| SDCM | 4 |
| UGR | 28 |

Datasheet generated from <https://onetimepim.com> last updated Thursday, October 13, 2022 10:03:30 PM



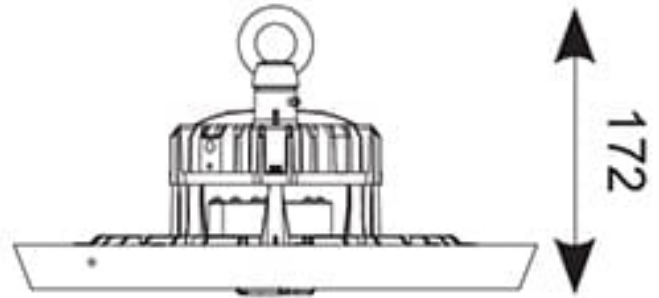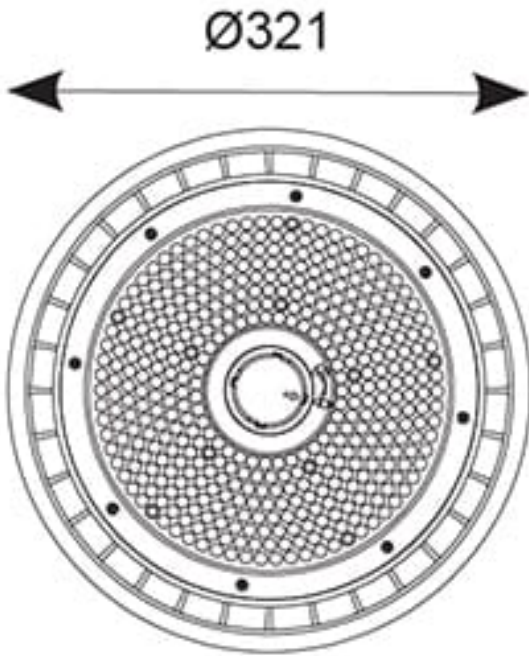

AZPELED/2