


FType ADJUSTABLE DOWNLIGHT

Product Features

- Super efficient LED downlight with speed-fit terminal block
- Fully tested to 30, 60 and 90 min fire rating and insulation coverable
- Tilt angle of up to 20 degrees
- Supplied with True Matt White flat bezel
- Fire rated, Acoustic Rated to Part E, Air Leakage rated to Part C and insulation coverable

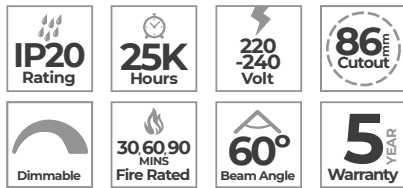


CAT NO.	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP
EFTA60W30	600	6W	3000K
EFTA60W40	600	6W	4000K

Product Accessories

CAT NO.	BEZEL COLOUR	FINISH
EFTABZPC	Polished Chrome	Flat
EFTABZAR	Black	Flat
EFTABZBS	Brushed Steel	Flat

Bezels

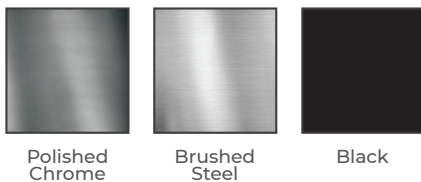


Polished Chrome

Brushed Steel

Black




Product Drawing

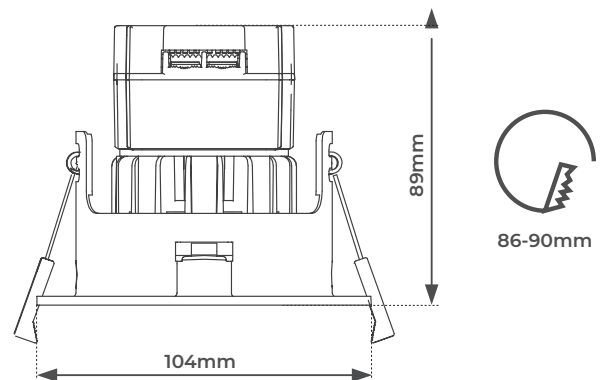

CAT NO.	WEIGHT (kg)	EFFICACY (Lm/W)	CRI	FREQUENCY (Hz)	TEMP RANGE	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE	CUT OUT (mm)
EFTA60W30	0.4	100	>83	50-60	-20 to +40	25	L70/B50	86-90
EFTA60W40	0.4	100	>83	50-60	-20 to +40	25	L70/B50	86-90

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment



LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012