

110V OPEN AREA WORK LIGHT




Product Features

- Work light complete with foldable legs and carry strap
- Offers 360 degree distribution for open areas or 180 degrees for direct lighting
- Supplied with 3000mm 3 core rubber cable
- Supplied with 110V 16A plug to EN 60309



CAT NO.	VOLTAGE	LUMINAIRE LUMENS	WATTAGE
LSLOAW361V	110V	3600	40W
LSLOAW362V	230V	3600	40W

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY	IK RATING	CABLE TYPE	CABLE LENGTH	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LSLOAW361V	3.3	>80	50-60	IK06	H07RN-F 1.0mm ²	3000mm	-20 to +25	25
LSLOAW362V	3.2	>80	50-60	IK06	H07RN-F 1.0mm ²	3000mm	-20 to +25	25

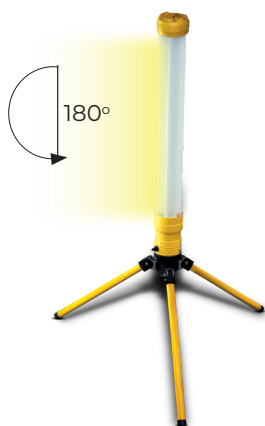

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-4	Luminaires – Portable
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
C
D
E

} LED

The lamps cannot be changed in the luminaire.

874/2012

