

FORTIS WALLPACK


Product Features

- Die-cast aluminium body and polycarbonate lens supplied with anti-tamper screws
- 1500-3500 Lumens with 6-1 space to height ratio designed to replace 70W son lamps for building perimeter illumination
- Wall mounted with hinged gear tray for ease of installation



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/cW
LWF15S40	Fixed Output	1500	15W	100
LWF15E40	Fixed Output + Emergency	1500	15W	100
LWF15D40	Digital Dimmable	1500	15W	100
LWF15ED40	Digital Dimmable + Emergency	1500	15W	100
LWF15S40PC	Fixed Output + Photocell	1500	15W	100
LWF15E40PC	Integral Photocell and 3HR Emergency	1500	15W	100
LWF35S40	Fixed Output	3500	35W	100
LWF35E40	Fixed Output + Emergency	3500	35W	100
LWF35D40	Digital Dimmable	3500	35W	100
LWF35ED40	Digital Dimmable + Emergency	3500	35W	100
LWF35S40PC	Fixed Output + Photocell	3500	35W	100
LWF35E40PC	Integral Photocell and 3HR Emergency	3500	35W	100



Product Drawing

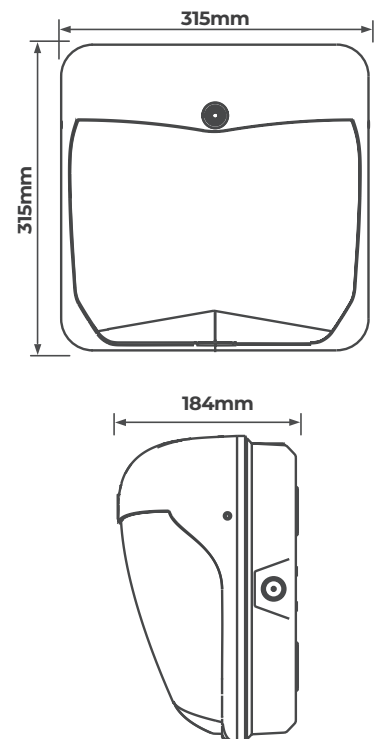

To Specify:

Wall mounted luminaire with a die-cast aluminium body and opal polycarbonate lens. Designed to illuminate building facades and external walkways.

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	SDCM	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LWF15S40	3.0	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF15E40	3.2	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF15D40	3.0	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF15ED40	3.2	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF15S40PC	3.1	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF15E40PC	3.3	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35S40	3.0	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35E40	3.2	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35D40	3.0	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35ED40	3.2	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35S40PC	3.1	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10
LWF35E40PC	3.3	>80	50-60	<6	IK04	-20 to +25	25	L70 / B10

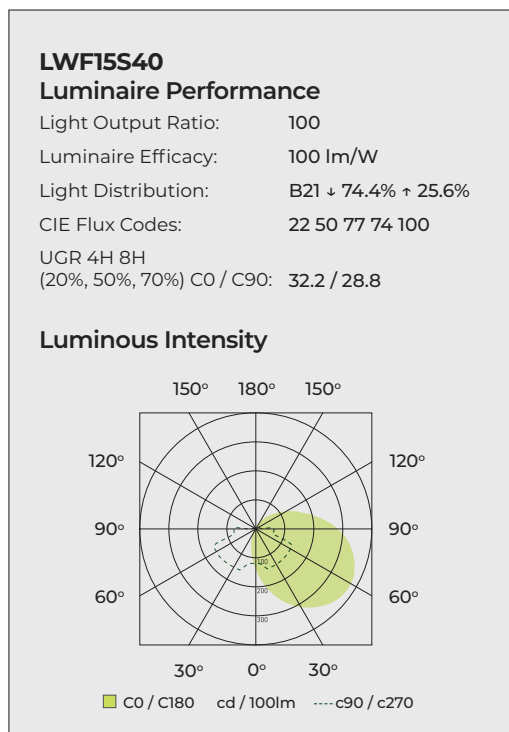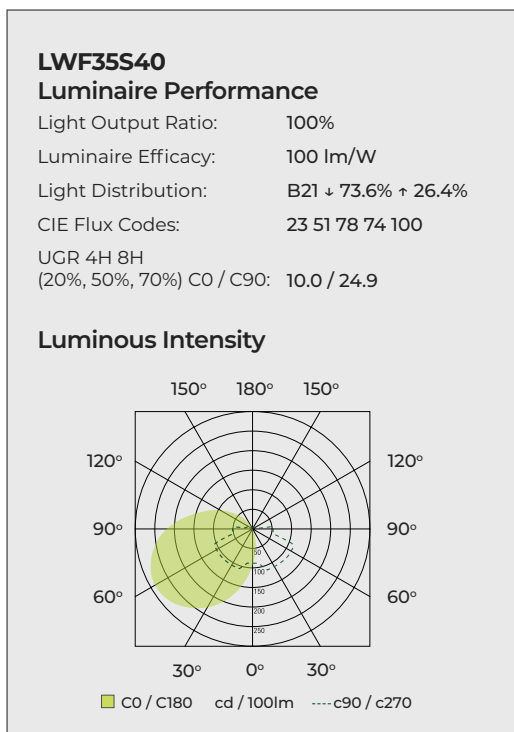

LUCECO

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

LED

The lamps cannot be changed in the luminaire.

874/2012

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 60598-2-22	Luminaires – Emergency
EN 61347-1	Lamp controlgear – Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear – Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

