



# Spectrum

## LED Emergency 6 in 1 Exit Blade

### Surface / Suspended / Recessed / Wall / Parallel / Angled Mounting

- Sleek, energy efficient design
- Suitable for Commercial and industrial installations
- Different legend options available
- Maintained / Non Maintained
- 3 Year guarantee
- Viewable from both sides
- Viewing distance 25m
- IP20



**Manual Push Test Indicator**  
Once activated, unit illuminates for 5 minutes to indicate fitting is functioning correctly. Key Test feature can also be used.



#### 09066 Legend Options



**09067** New (ISO) Legend Reversible Left & Right

**09068** (ISO) New Legend Down

Must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.





# Spectrum

## Technical Specification

Data	
Construction	Polycarbonate
LED Chip	Samsung
IP Rating	IP20
Operating Temp	0°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9

Code	W	Description	Viewing Distance	Temp	Hours
09066	2.5	LED Emergency 6 in 1 Exit Blade	25M	6500K	30000
09067	-	New (ISO) Legend Reversible Left & Right	-	-	-
09068	-	New (ISO) Legend Down	-	-	-

09066 Exit Blade

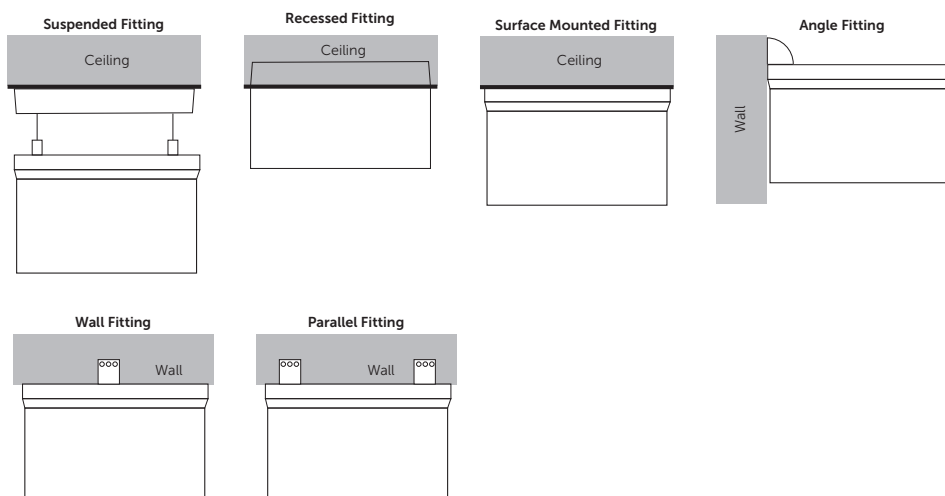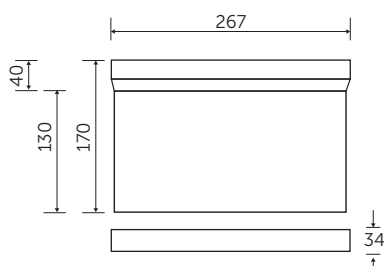

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio  
<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index  
<sup>3</sup> Subject to terms & conditions (Contact Customer Service)