

BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module:

LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum


LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum

Code: **09598** (page 83)

FirestayLED

Integrated LED Fixed Downlight

- IP65
- 30/60/90 minutes certified firestay
- Part B / C / E compliant
- White bezel & magnetic satin bezel
- Part L compliant

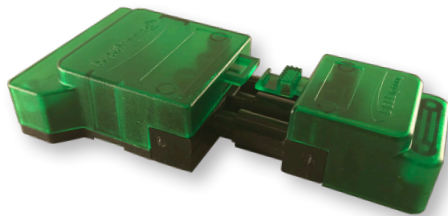

Easy Fit Magnetic Bezel



Includes BELL Quick Fix Connector - Plug & Play Fitting
Loop in / loop out terminals. Quick release connector for ease of insulation resistance testing.

Code	Description	Colour Temperature	lm	cd	Beam°	Hrs
10500	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Warm White 3000K	580	1050	40°	35000
10501	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Cool White 4000K	595	1200	40°	35000
10502	6W Firestay LED Integrated Fixed Downlight, incl White & Satin Bezels	Daylight 6000K	610	1150	40°	35000
10503	Magnetic Chrome Bezel	-	-	-	-	-
10504	Magnetic Brass Bezel	-	-	-	-	-
09598	BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module	-	-	-	-	-
08197	BELL Quick Fix Connector	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlight	-	-	-	-	-

