



FirestayLED

CCT 3 way selectable colour switch

Integrated LED Fixed / Tilt Downlight

- 30/60/90 minutes certified firestay
- Fixed Downlight / Centre Tilt IP65
- Fixed Downlight / Centre Tilt - Front CCT switch
- 6 in 1 Fixture, 3 colour temperatures, 2 bezel
- Includes satin & white magnetic bezels
- Part B / C / E compliant
- IC rated



BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module:


LED Dimmable bulb - Min 5W ~ Max 100W - 10 Downlights maximum

LED Dimmable driver - Min 5W ~ Max 100W - 10 Downlights maximum



Code: 09598 (page 83)



Selectable Colour Temperature



Simply move the switch located under the magnetic bezel to your desired colour temperature

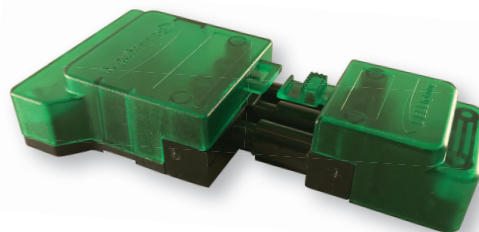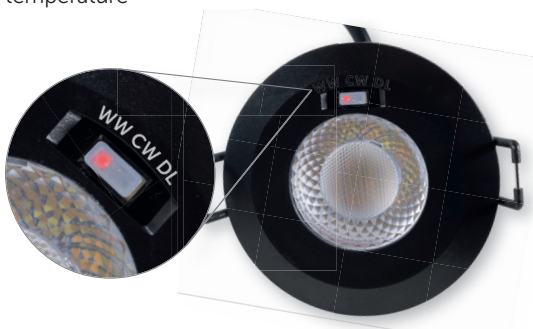

Includes BELL Quick Fix Connector - Plug & Play Fitting

Loop in / loop out terminals. Quick release connector for ease of insulation resistance testing.






FirestayLED

CCT 3 way selectable colour switch


Technical Specification

Data	
Construction	Die-Cast Aluminium
Driver	On Board
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio



08186 / 08187 / 08190 7W

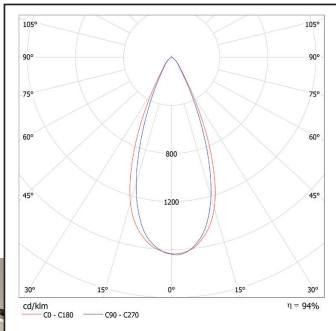

08186/08187

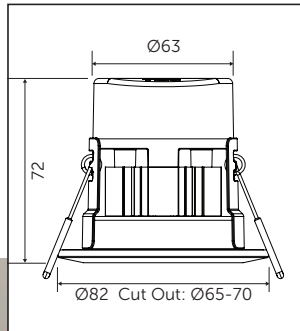

08190

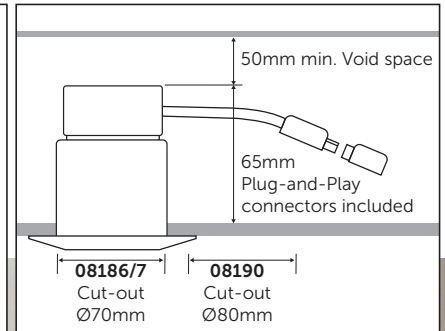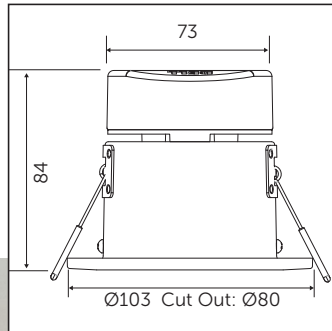

Code	Description	Colour Temperature	lm	cd	Beam ^o	Hrs
08186	7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 60° Beam Angle	3000K/4000K/6000K	530/550/600	370	60°	50000
08187	7W Firestay LED CCT 3 Way Selectable Colour Switch Downlight Dimmable, Plug & Play, 40° Beam Angle	3000K/4000K/6000K	530/550/600	530	40°	50000
10560	Chrome Magnetic Bezel for above	-	-	-	-	-
10561	Brass Magnetic Bezel for above	-	-	-	-	-
10562	Antique Brass Magnetic Bezel for above	-	-	-	-	-
10563	Matt Black Magnetic Bezel for above	-	-	-	-	-
08193	White Spacer Plate for above (100mm cut out)	-	-	-	-	-
08194	Satin Spacer Plate for above (100mm cut out)	-	-	-	-	-
08190	7W Firestay CCT 3 Way Selectable Colour Switch Center Tilt LED Downlight, Dimmable, Plug & Play, 40° Beam Angle	-	-	-	40°	-
08200	Chrome Magnetic Bezel for above	-	-	-	-	-
08201	Brass Magnetic Bezel for above	-	-	-	-	-
08202	Antique Brass Magnetic Bezel for above	-	-	-	-	-
08203	Matt Black Magnetic Bezel for above	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlights	-	-	-	-	-
09598	BELL Universal LED Microprocessor Controlled Trailing Edge Dimmer Module	-	-	-	-	-



¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)

Technical Helpline +44 (0)1924 893380