



Firestay slim

Integrated LED Fixed/Centre Tilt Downlight

- FireStay Certification: 30, 60 and 90 minute solid joist ceilings
30 minute I-Joist ceiling systems
- IP65 - Fixed Versions / IP44 - Tilt Version
- 30/60/90 minutes firestay
- Part B / C / E compliant
- Choice of finishes
- Dimmable
- Cut Out Ø64-68 mm
- Tool Free Connector



**IC rated up to 270mm
insulation depth**



Tool Free Connector
2.5mm twin earth loop
in / loop out push-fit
connectors



Code	Description	Colour Temp	lm	Beam ^o	Hrs
10675	5W Firestay Integrated LED Fixed Downlight White Bezel	3000	462	60°	35000
10676	5W Firestay Integrated LED Fixed Downlight White Bezel	4000	492	60°	35000
10677	5W Firestay Integrated LED Fixed Downlight Satin Bezel	3000	462	60°	35000
10678	5W Firestay Integrated LED Fixed Downlight Satin Bezel	4000	492	60°	35000
10679	5W Firestay Integrated LED Fixed Downlight Chrome Bezel	3000	462	60°	35000
10680	5W Firestay Integrated LED Fixed Downlight Chrome Bezel	4000	492	60°	35000
10681	5W Firestay Integrated LED Centre Tilt Downlight White Bezel	3000	450	60°	35000
10682	5W Firestay Integrated LED Centre Tilt Downlight White Bezel	4000	478	60°	35000
10683	5W Firestay Integrated LED Centre Tilt Downlight Satin Bezel	3000	450	60°	35000
10684	5W Firestay Integrated LED Centre Tilt Downlight Satin Bezel	4000	478	60°	35000
10685	5W Firestay Integrated LED Centre Tilt Downlight Chrome Bezel	3000	450	60°	35000
10686	5W Firestay Integrated LED Centre Tilt Downlight Chrome Bezel	4000	478	60°	35000




Firestayslim

Technical Specification


Data	
Construction	Pressed Steel
Driver	BELL
LED Chip	Samsung
IP Rating	IP65 / IP44
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

* All BELL Lighting luminaires are rated L80 B10, so for a 50,000 hour product. L80B10 at 50,000 hours our fittings will still have 80% of initial lumen, only 10% of fittings will fail to achieve this.

10675 5W

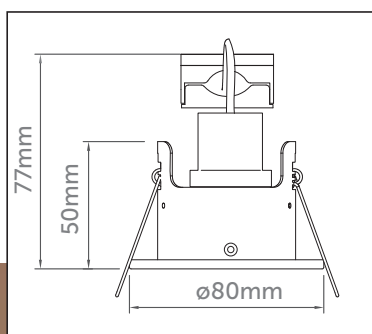

10681 5W

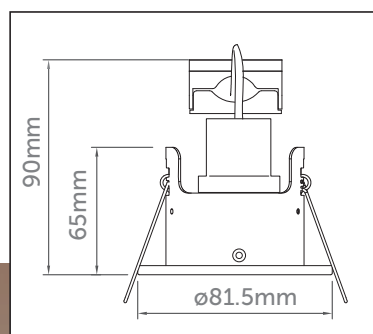

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio
² Exceeds EU standard of RA 80 for Colour Rendering Index
³ Subject to terms & conditions (Contact Customer Service)