






01604 495 151
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

GL019 Frosted

1W, 13lm frosted mini ground light

Features

IK rating	IK07
IP rating	IP68
CSP Switchable	Fixed colour
Walk Over / Drive Over	Walk over
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

Cut Out Size	Ø 33mm
UK Bathroom Zone	0
Construction Material	Stainless steel (316)
Weight	196g
Maximum Ambient Temperature	50°C
Electric Class (1, 2, 3)	3

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	9
PLR/350 1-5	N/A	Yes	No	0	1	5
PLD UNI-DRIVE 350MA	N/A	Yes	Yes (1-10V)	2	1	10

Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately
PDC/GRID DIMMER		

PRODUCT CODES

Product Code	Description
GL019DC0F40	Frosted 1W mini LED Ground light / Marker light
GL019DC0F30	Frosted 1W mini LED Ground light / Marker light
GL019DC0F27	Frosted 1W mini LED Ground light / Marker light
GL019DC0FBL	GL019 Frosted Blue Ground Light
GL019BC0F27	Black Frosted 1W mini LED Ground light / Marker light
GL019BC0F30	Black Frosted 1W mini LED Ground light / Marker light
GL019BC0F40	Black Frosted 1W mini LED Ground light / Marker light
GL019BC0FBL	Black Frosted 1W mini LED Ground light / Marker light

Guarantee

7 year extended warranty


Features & benefits

- 1W at 350mA or 700mA
- Frosted effect for low glare and soft lighting
- Low voltage groundlight
- Robust cable for outdoor use
- Shallow depth for easy installation
- Marine-grade stainless steel 316

Light source energy efficiency:



Beam angle: 100°

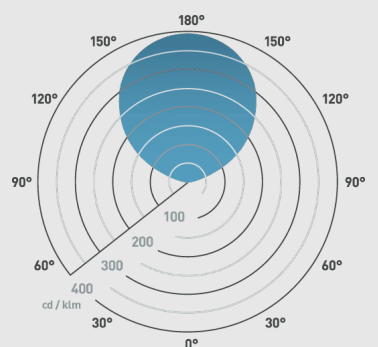

Ø40mm

