Installation and Safety Instructions Flush Light Fitting

Safety Warnings

These instructions are for your safety. Please read through them thoroughly before use and retain them for future reference. If you are in any doubt about installing this product, consult a qualified electrician.

This product is only suitable for connection to a 220-240V~ 50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local building regulations. It is for domestic ceiling use only, and is not suitable for a bathroom location.

This is a Class I product and must be Earthed. The terminal blocks are supplied according to requirements of the fitting.

IMPORTANT: Always switch off the mains supply during installation or maintenance. We recommend that the fuse is withdrawn or the circuit breaker switched off at the distribution board whilst work is in progress (turning off the light switch is not sufficient). Connection should be via a wall switch to enable safe isolation.

The product must be securely fixed to the mounting surface using the screws and wall plugs supplied. The screws and wall plugs supplied are suitable for "masonry" only. Other fixings are not supplied and must be purchased.

Decide on the position of the light fitting or remove existing light fitting. Note the position of the electrical connections, and ensure there is a solid mounting surface, Preferably a wooden joist or joist bridge, to support the weight of the light fitting.

Take care not to drill into any pipes or mains cables beneath the surface during mounting holes preparation.

Never put anything on the product or hang anything on any part of this product.

IMPORTANT: Ensure that all electrical connections are tight and that no loose strands are left out of the terminal.

Never fit bulbs of a higher wattage than those specified on the label (as these may cause over heating and damage the fitting).

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Care and maintenance

For bulb replacement, switch off the product (preferably, isolate it at the distribution board) and allow it to cool down (Caution: bulb gets hot during use).

Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Troubleshooting


When the bulb does not light after installation:

- > Ensure there is no electricity failure.
- > Ensure all the connections are secure.


If you have any doubt about installation/use of this product, consult a qualified electrician.



Assembly Instructions

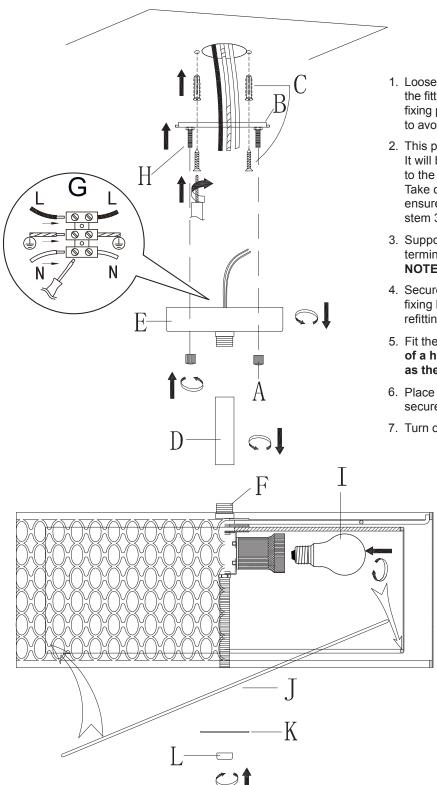





FR Scannez le code QR pour plusieurs langues

Escanee el código QR para varios idiomas

Zeskanuj kod QR dla wielu języków

Scannen Sie den QR-Code nach mehreren Sprachen

© Scansiona il codice QR per multilingua

1. Loosen the finials (A) and remove the fixing bracket (B) from the fitting. Using the screws and wall plugs (C) supplied in the fixing pack, secure the fixing strap to the ceiling, taking care to avoid damaging any concealed wiring.

- This product has been packed with the stem detached.
 It will be necessary to refit the stem before wiring and fixing to the ceiling. Screw the stem (D) onto the ceiling cover (E). Take care not to trap any wiring or cross the threads. To ensure internal cable is not twisted, twist the assembled stem 3 times anti-clockwise before screwing into boss (F).
- Support your fitting and connect the house wiring to the terminal blocks (G) – see expanded wiring details below.
 NOTE: This is a Class I product and must be earthed.
- 4. Secure the product to the fixing bracket (B) by locating the fixing bolts (H) through the holes in the ceiling cover and refitting the finials (A) set aside earlier.
- Fit the bulbs (I) not supplied). NOTE: Never fit bulbs
 of a higher wattage than those specified on the label,
 as these may cause overheating and damage the fitting.
- 6. Place the diffuser (J) inside the bottom of the shade and secure in place with the washer (K) and finial (L)
- 7. Turn on the power and test.

