


The GreenBrook LED ACP light fittings give an even and constant light output. Complete with **polycarbonate base and frosted diffuser with stainless steel diffuser clips**, this product is ideal for use in commercial and industrial installations

- Fitting includes LED driver
- Metal gear tray
- Polycarbonate base and frosted diffuser
- Stainless steel diffuser clips
- Emergency option available
- Suitable for commercial and industrial applications
- Maintained/Non Maintained

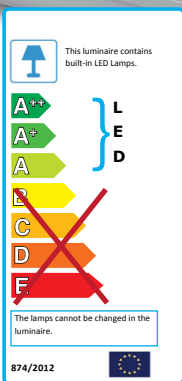

	ACPLED15N	ACPLED16N	ACPLED25N	ACPLED26N	ACPLED15EMN	ACPLED16EMN	ACPLED25EMN	ACPLED26EMN
Product Finish	Grey	Grey	Grey	Grey	Grey	Grey	Grey	Grey
Product Dimensions	1565mm / 5ft	1835mm / 6ft	1565mm / 5ft	1835mm / 6ft	1565mm / 5ft	1835mm / 6ft	1565mm / 5ft	1835mm / 6ft
Product weight	2.109kg	2.544kg	2.922kg	3.518kg	2.709kg	3.1kg	3.5kg	3.952kg
Barcode	5012739644139	5012739644153	5012739644177	5012739644191	5012739644146	5012739644160	5012739644184	5012739644207
IP Rating	IP65							
Class	I	I	I	I	I	I	I	I
Luminaire output	4000lm	4750lm	7800lm	9400lm	4000lm	4750lm	7700lm	9400lm
Luminaire emergency output	-	-	-	-	320lm			
Emergency Duration	-	-	-	-	More than 3 hrs			
Lamp Type	Single LED	Single LED	Twin LED	Twin LED	Single LED	Single LED	Twin LED	Twin LED
Lamp life expectancy	50,000 hrs							
Colour Temperature	5,000K							
Voltage	200V - 240V AC 50Hz							
Max Wattage	40W	48W	2 x 40W	2 x 48W	40W +5W	48W + 5W	2 x 40W +5W	2 x 48W +5W
Operating Temp	-20 to 40°C							
Main housing material	Polycarbonate base & frosted diffuser							
Fixings	12 clips	12 clips	14 clips	14 clips	12 clips	12 clips	14 clips	14 clips
Guarantee	3 Years							
Certification & Conformity	EN 61547:2009, EN61000-3-2-2014, EN61000-3-3-2013, EN55015:2013							
Emergency Pack Wattage					5W	5W	5W	5W
Emergency Light Response					<1.5 secs	<1.5 secs	<1.5 secs	<1.5 secs

TECHNICAL DATA SHEET

EMC



GREEN BROOK ELECTRICAL

Tel +44 (0) 1279 772 772
 Fax +44 (0) 1279 422 007
 www.greenbrook.co.uk