
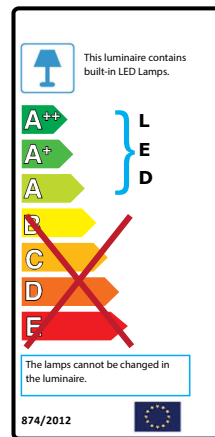


This range of LED Ultra slim fittings add subtle downlighting to your home. In a colour choice of 3000K Warm White or 4000K Cool White, supplied with 2M power lead and 500mm link lead, Opal diffuser and mounting clips.

- Individually switched
- Quick start
- Fittings may be butted together or linked with optional link leads (Max 10 connections)
- Link leads available separately
- Ideal for pelmets, under shelves, bookcases or cabinets

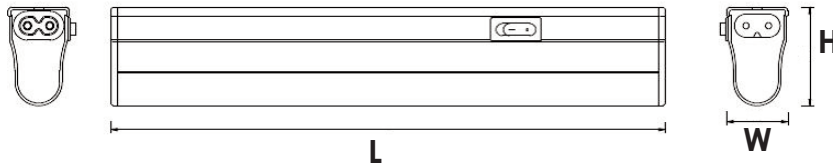

	UCLED3WW (Warm White) UCLED3CW (Cool White)	UCLED5WW (Warm White) UCLED5CW (Cool White)	UCLED8WW (Warm White) UCLED8CW (Cool White)	UCLED14WW (Warm White) UCLED14CW (Cool White)	UCLED16WW (Warm White) UCLED16CW (Cool White)
Product Finish	Polycarbonate Body and Diffuser - White				
Max Wattage	3W	5W	8W	14W	16W
Product Dimensions	L222 X W23 X H37mm	L296 x W23 x H37mm	L525 x W23 x H37mm	L857 x W23 x H37mm	L1157 x W23 x H37mm
Product weight	0.13Kg	0.23Kg	0.50Kg	0.61Kg	0.70Kg
Barcode	UCLED3WW - 5012739 645624 UCLED3CW- 5012739 645617	UCLED5WW - 5012739 645648 UCLED5CW- 5012739 645631	UCLED8WW - 5012739 645662 UCLED8CW- 5012739 645655	UCLED14WW - 5012739 645686 UCLED14CW- 5012739 645679	UCLED16WW - 5012739 645709 UCLED16CW- 5012739 645693
Lumens (lumens/watt)	UCLED3WW - 240 / 80lm/W UCLED3CW- 270 / 90lm/W	UCLED5WW - 400 / 80lm/W UCLED5CW- 450 / 90lm/W	UCLED8WW - 700 / 88lm/W UCLED8CW- 750 / 94lm/W	UCLED14WW - 1300 / 93lm/W UCLED14CW- 1400 / 100lm/W	UCLED16WW - 1500 / 94lm/W UCLED16CW- 1600 / 100lm/W
Lamp Type	LED Array				
Beam Angle	120°				
IP Rating	IP20				
Lamp life expectancy	30,000 hrs				
Class Type	II				
Colour Temperature	4,000K (Cool White - CW) / 3,000k (Warm White - WW)				
Voltage	230V AC - 50Hz				
Operating Temp	-10 to + 40°C				
Main housing material	Polycarbonate				
Switching Cycle	20,000				
Guarantee	3 Years				
Certification & Conformity	EN60598-1, EN 60598-2-1, EN 61347-1				

- ACCESSORIES

Link Leads and mounting clips available to purchase separately.



Link Leads

UC250LL - 250mm / UC500LL - 500mm / UC1000LL - 1000mm

UCMCP
Mounting Clips

	UC250LL	UC500LL	UC1000LL	UCMCP
Contents	Link Lead	Link Lead	Link Lead	Mounting Clip Pack
Cable Length	250mm	500mm	1000mm	-
Barcode	5012739 645723	5012739 645730	5012739 645747	5012739 645716
Rated Current	230V AC~50Hz			
Guarantee	1 Year			

Each 'Libra' link light comes complete with 2M power lead, 500mm link lead, Opal diffuser and mounting clips.

