

VELA Compact

- 7W LED Fire Rated Downlights

- + Low profile downlight for shallow ceiling voids
- + Certified for 30, 60 & 90 minute fire rated ceilings
- + Quick connect - Loop in/loop out driver
- + Additional bezels for the Fixed fittings - Satin Chrome LEDDLCEZSC & Polished Chrome LEDDLCEZPC
- + Choice of bezel finishes in the tilt - White, Satin Chrome & Polished Chrome

Dimmable


Fixed
IP65



Tilt
IP44
Low Profile
Depth 40mm

Air Circulation Information

To prevent accidental damage to the luminaire and to ensure good air flow around the fitting we recommend the minimum clearances as shown.



	VC3KW	VCT3KW	VCT3KSC	VCT3KPC	VC4KW	VCT4KW	VCT4KSC	VCT4KPC
Description	White Fixed	White Tilt	Satin Chrome Tilt	Polished Chrome Tilt	White Fixed	White Tilt	Satin Chrome Tilt	Polished Chrome Tilt
Barcode	5012739 653223	5012739 653261	5012739 653254	5012739 653247	5012739 653230	5012739 653292	5012739 653285	5012739 653278
Cut Out	60mm	76mm			60mm	76mm		
Dimensions	W80 x H51mm	W86.5 x H40mm			W80 x H51mm	W86.5 x H40mm		
IP rating	IP65	IP44			IP65	IP44		
Lamp Type	LED COB							
Tilt Angle	n/a	50° inclusive (25° each side)			n/a	50° inclusive (25° each side)		
Beam Angle	60°	40°			60°	40°		
Class Type	II							
Colour Temp	3,000K	3,000K			4,000K	4,000K		
Lumen Output	620	620			640	640		
Energy Class	F							
CRI	>80							
Standby Power	0.2W							
MacAdam Steps	<3							
Wattage	7W							
Ballast Type	LED Driver							
Voltage	230V ~ 50Hz							
Product Weight	180g	220g			180g	220g		
Guarantee	3 Year							
Conforms To	BS EN 60598-1							

VELA Compact


- 7W LED Fire Rated Downlights

20A Lighting Connectors

- Suitable for use with the 'Vela Range'

+ Time saving products for all your connecting requirements

QUICK Connekt³

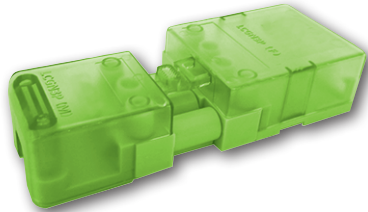

Part No: LCGN3P

QUICK Connekt⁺



Part No: LCGN3PLS
Complete with Quick Click push-fit terminals

QUICK Connekt⁴




Part No: LCGN4P

All connectors sold in POS display boxes of 50

LED 3W Emergency Driver

- Suitable for use with the 'Vela Range'

- + Built in battery supplying 3 hours emergency operation in light of a mains failure
- + Maintained / Non-Maintained
- + Quick & easy to connect
- + Compact & lightweight - screw-less assembly
- + Separate small green LED indicator giving status of battery charge
- + Bezel mount for LED - for ease of installation in ceilings

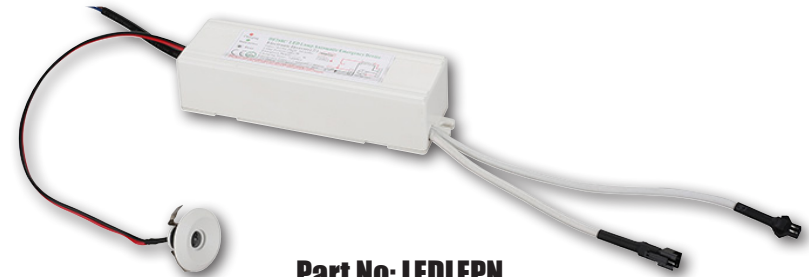

Part No: LEDLEPN

