

VELA Switch RANGE

7.5W LED FIRE RATED DOWNLIGHTS

- Colour change downlights from 3,000K to 4,000K
- Choice of frosted or clear lens
- Certified for 30, 60 or 90 minute fire rated ceilings
- Dimmable
- Integrated driver
- Loop in, Loop out connections on driver
- Additional bezels available - Gold, Matt Black, Satin Chrome & Polished Chrome
- Conforms to EN 60598-1,-2-2 and EN 61347-2-13

Bezel Finishes



Black



Satin Chrome



Polished Chrome




Gold



Fixed - Clear Lens



Fixed - Frosted Lens



| | VSWITCHC - Clear Diffuser | VSWITCHF - Frosted Diffuser |
|---------------------------------------|------------------------------|--------------------------------|
| Product Finish | White | |
| Downlight Style | Fixed | |
| Cut out | 73mm | |
| Size | W85 x H83mm | |
| Product weight | 220g | |
| Barcode | 5012739 645983 | 5012739 645990 |
| IP Rating | IP65 | |
| Lamp Type | LED | |
| Beam Angle | 60° | 95° |
| Colour Temp | 3,000K/4,000K | |
| Class | I | |
| Luminaire Lumens Output 3000K | 580, 76 lm/W | 400, 52 lm/W |
| Luminaire Lumens Output 4000K | 610, 81 lm/W | 450, 62 lm/W |
| Voltage | 230V ~ 50Hz | |
| Wattage | 7.5W | |
| CRI | >80 | |
| Ballast Type | LED Driver | |
| Guarantee | 3 year | |
| Certification & Conformity | Conforms to Part B, C, E & L | |

3 Year Warranty


20A Lighting Connector

- suitable for use with the 'VELA' range

- ▶ Time saving product for all your connecting requirements

Box Qty
50


QUICK³
Connekt

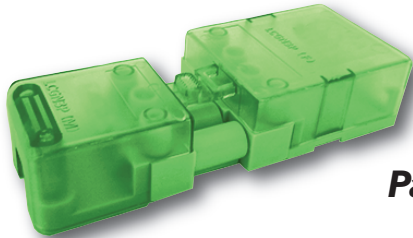

Part No: LCGN3P

QUICK⁴
Connekt

- Ideal for emergency lighting

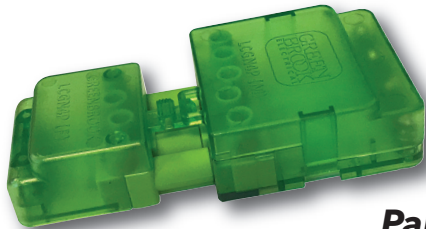

Part No: LCGN4P

LED 3W Emergency Driver

- suitable for use with 'VELA' Range

- ▶ Built in battery supplying 3 hours emergency operation in light of a mains failure
- ▶ Quick & easy to connect
- ▶ Compact & lightweight - screwless assembly
- ▶ Separate small green LED indicator giving status of battery charge
- ▶ Bezel mount for LED - for ease of installation in ceilings



Part No: LEDLEP