

# DATASHEET


# Hamilton®

making connections beautifully


Code: 72CSS2USBULTSB-W

Hartland CFX | HARTLAND CFX RANGE | USB Power Sockets

## Product Image

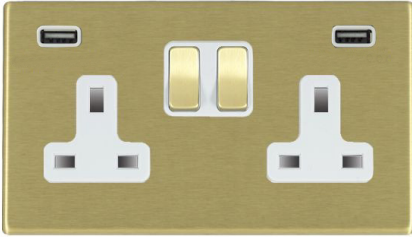


## Wiring

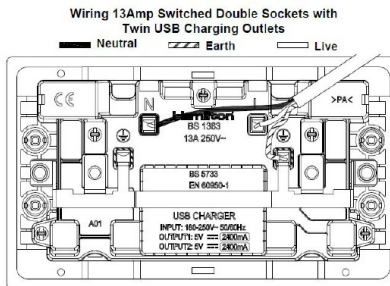

## Dimensions

**Hamilton®**  
HARTLAND CFX  
SS2USBX2ULT

2 gang 13A Double Pole Switched Socket with  
2 USB Outlets 2x2.4A (4.8A Total)

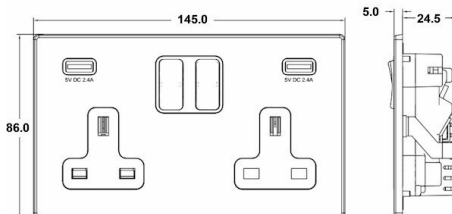

## Insert Type

2 gang 13A Double Pole Switched Socket with 2 USB Outlets 2x2.4A (4.8A Total)

## Insert Colour

Satin Brass/White

## EAN13 Barcode

5017504089979

## Commodity Code

85363010

## Luckins TSI

405688755

## Dimensions(Nominal)

Double: Height = 86.0mm Width = 145.0mm Depth = 5.0mm

## Weight

239 GR

## Fixing Hole Centres

Box Fixing = 120.6mm Grid Fixing = CFX Clips

## Switched Poles

Double

## Current Rating

13 Amp, USB 2 x 2.4A

## Voltage

180/250V AC USB = 5V

## Maximum Load

13 Amp, USB = 2.4A X 2

## Mains Frequency

50/60Hz

## IP Rating

IP2XD

## Contact Gap Minimum

3mm

## Terminal Capacity 1

3x2.5mm<sup>2</sup>

## Terminal Capacity 2

3x4mm<sup>2</sup>

## Terminal Capacity 3

2x6mm<sup>2</sup> Multi-Strand

## Earth Terminal Capacity 1

3x2.5mm<sup>2</sup>

## Earth Terminal Capacity 2

3x4mm<sup>2</sup>

## Earth Terminal Capacity 3

2x6mm<sup>2</sup> Multi-Strand

## Product Class 1

Must be earthed

## Ambient Operating Temperature

-15°C to +40°C

## Recommended Location

Internal Use Only

## Maximum Installation Altitude

2000m

## Standard/Approval

BS1363 BS EN 62368

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 5/11/2023 9:48:43 AM E&OE