

DATASHEET

Code: 74J45W


Hartland | HARTLAND RANGE | Telephone and Data Outlets

Product Image



Wiring

RJ45 CAT5e Rear View



RJ45 CAT5e and CAT6 Wiring Colour Codes

Pin No.	TIA/EIA Wiring Schedule	Colour Codes	Schedule 6008	Schedule 6009
1	WHITE / Green	WHITE / Orange		
2	GREEN / White	ORANGE / White		
3	WHITE / Orange	WHITE / Green		
4	BLUE / White	BLUE / White		
5	WHITE / Blue	WHITE / Blue		
6	ORANGE / White	GREEN / White		
7	WHITE / Brown	WHITE / Brown		
8	BROWN / White	BROWN / White		

Please always check with the colour coding found on the product.


Insert Type	1 gang RJ45 CAT 5E Outlet - Unshielded
Insert Colour	White
EAN13 Barcode	5028690240723
Commodity Code	85176990
Luckins TSI	385553340
Dimensions(Nominal)	Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm
Weight	77 GR
Switched Poles	N/A
Current Rating	n/a
IP Rating	IP2XD
Contact Gap Minimum	N/A
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4x1.5mm ²
Earth Terminal Capacity 3	3x2.5mm ²
Earth Terminal Capacity 4	1 x 4mm ² Multi-Strand
Earth Terminal Capacity 5	1x6mm ²
Product Class 1	Must be earthed (ref BS 7671 415.2.1)
Ambient Operating Temperature	-5° to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	N/A

Dimensions

Hamilton®
HARTLAND

J45

1 gang RJ45 -CAT 5E Outlet Unshielded 8 wire

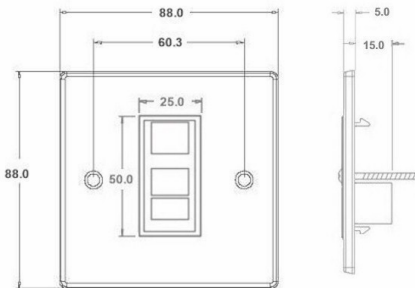

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 2/28/2023 4:51:37 PM E&OE