


**Code:** 76DPNCSC-B

**Hartland | HARTLAND RANGE | Double Pole Switches**

## Product Image




## Wiring

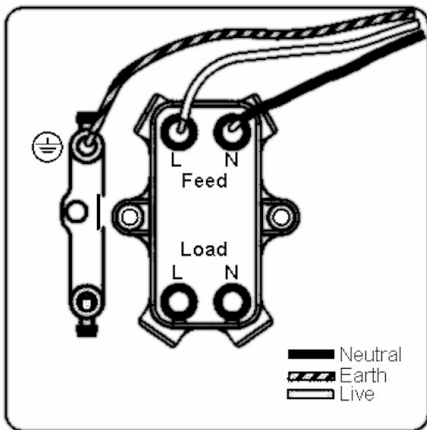

## Dimensions

**Hamilton®**  
HARTLAND  
DPNC

Double Pole Rocker & Neon & Cable Outlet

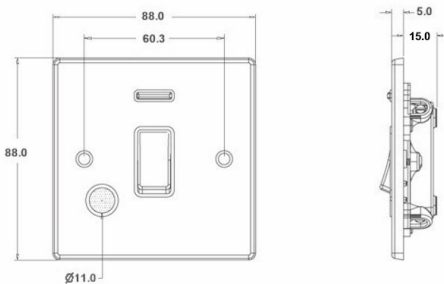

## Insert Type

1 gang 20AX Double Pole Rocker + Neon + Cable Outlet

## Insert Colour

Satin Chrome/Black

## EAN13 Barcode

5017503266852

## Commodity Code

85363030

## Luckins TSI

385554569

## Dimensions(Nominal)

Single: Height = 88.0mm Width = 88.0mm Depth = 5.0mm

## Switched Poles

Double

## Current Rating

20AX

## Voltage

220/250V AC

## Maximum Load

20 Amp inductive

## Mains Frequency

50Hz

## IP Rating

IP2XD

## Contact Gap Minimum

3mm

## Terminal Capacity 1

3x2.5mm<sup>2</sup>

## Terminal Capacity 2

2x4mm<sup>2</sup> Multi-strand

## Terminal Capacity 3

1x6mm<sup>2</sup>

## Earth Terminal Capacity 1

6x1mm<sup>2</sup>

## Earth Terminal Capacity 2

5x1.5mm<sup>2</sup>

## Earth Terminal Capacity 3

3x2.5mm<sup>2</sup>

## Earth Terminal Capacity 4

2x4mm<sup>2</sup> Multi-strand

## Earth Terminal Capacity 5

1x6mm<sup>2</sup>

## Product Class 1

Must be earthed

## Ambient Operating Temperature

-5° to +40°C

## Recommended Location

Internal Use Only

## Maximum Installation Altitude

2000m

## Standard/Approval

BS EN 60669-1

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: [info@hamilton-litestat.com](mailto:info@hamilton-litestat.com) | W: [www.hamilton-litestat.com](http://www.hamilton-litestat.com)

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 3/6/2023 4:46:55 PM E&OE