

**Code:** 7CBC3XLEDITB100

## Hartland CFX | HARTLAND CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

### Product Image




### Wiring



### Dimensions

**Hamilton®**  
HARTLAND CFX  
3XLEDITB  
LEDITB100 2 Way Dimmer

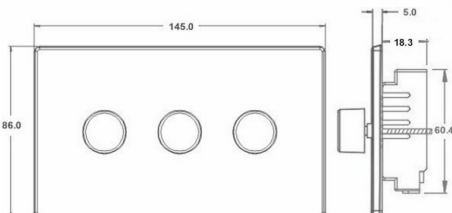

<b>Insert Type</b>	3 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
<b>Insert Colour</b>	Copper Bronze
<b>EAN13 Barcode</b>	5017504079789
<b>Commodity Code</b>	85365015
<b>Luckins TSI</b>	403364466
<b>Dimensions(Nominal)</b>	Double: Height = 86.0mm Width = 145.0mm Depth = 5.0mm
<b>Weight</b>	406 GR
<b>Fixing Hole Centres</b>	Box Fixing = 120.6mm Grid Fixing = CFX Clips
<b>Switched Poles</b>	Single
<b>Current Rating</b>	0.3A Per Gang
<b>Voltage</b>	230V AC
<b>Maximum Load</b>	5-70W Per Gang
<b>Mains Frequency</b>	50Hz
<b>IP Rating</b>	IP2XD
<b>Terminal Capacity 1</b>	2X1mm <sup>2</sup>
<b>Terminal Capacity 2</b>	2X1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	5x1mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	4X1.5mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	3X2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 4</b>	1X4mm <sup>2</sup> Multi-Strand
<b>Earth Terminal Capacity 5</b>	1X6mm <sup>2</sup>
<b>Product Class 1</b>	Face plate must be earthed
<b>Ambient Operating Temperature</b>	-5°C to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	BS EN 60669-2-1
<b>Additional Notes</b>	Trailing Edge & Leading Edge Dimmer

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,  
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes. This datasheet was generated on 5/11/2023 9:55:49 AM E&OE