

Code: 7CBC4XLEDITB100

Hartland CFX | HARTLAND CFX RANGE | LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmers

Product Image




Wiring



Dimensions

Hamilton[®]
HARTLAND CFX
4XLEDITB
LEDITB100 2 Way Dimmer

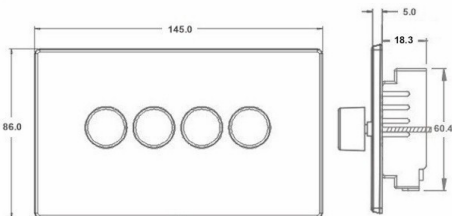

Insert Type	4 gang 100W LED Trailing/Leading Edge Push On/Off Rotary 2 Way Switching Dimmer
Insert Colour	Copper Bronze
EAN13 Barcode	5017504079796
Commodity Code	85365015
Luckins TSI	403364479
Dimensions(Nominal)	Double: Height = 86.0mm Width = 145.0mm Depth = 5.0mm
Fixing Hole Centres	Box Fixing = 120.6mm Grid Fixing = CFX Clips
Switched Poles	Single
Current Rating	0.3A Per Gang
Voltage	230V AC
Maximum Load	5-70W Per Gang
Mains Frequency	50Hz
IP Rating	IP2XD
Terminal Capacity 1	2X1mm ²
Terminal Capacity 2	2X1.5mm ²
Earth Terminal Capacity 1	5x1mm ²
Earth Terminal Capacity 2	4X1.5mm ²
Earth Terminal Capacity 3	3X2.5mm ²
Earth Terminal Capacity 4	1X4mm ² Multi-Strand
Earth Terminal Capacity 5	1X6mm ²
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5°C to +40°C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
Standard/Approval	BS EN 60669-2-1
Additional Notes	Trailing Edge & Leading Edge Dimmer

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre,
4-5 Bonville Road, Brislington, Bristol, BS4 5NZ

T: +44 (0)1747 860088

E: info@hamilton-litestat.com | W: www.hamilton-litestat.com

All accessories are manufactured under an accredited BS EN ISO 9001:2015 Quality Management System. It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. This datasheet was generated on 5/11/2023 9:56:13 AM E&OE