

**LIGHTSPAN T8 BATTEN 4FT TWIN WITH SENSOR & EMERGENCY 5600LM  
43W 130LM/W 4000K 120 BEAM LINKABLE NON-DIMM INTEGRAL**

ILBTC071



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

**Details**

<b>Quick Order Code:</b>	792088
<b>Barcode:</b>	5055788251248
<b>Category:</b>	Luminaires
<b>Range Name:</b>	Lightspan
<b>Type:</b>	Twin
<b>Product Body Finish:</b>	Matt white
<b>Market Segment:</b>	Indoor commercial, Industrial, residential
<b>Finish:</b>	Matt White
<b>Warranty (Years):</b>	3
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	1170
<b>Product Depth (mm):</b>	70
<b>Product Width (mm):</b>	60
<b>Product Weight (g):</b>	1450
<b>Optic:</b>	Polycarbonate diffuser
<b>Material:</b>	Polycarbonate, Aluminium
<b>Construction:</b>	Injection moulding
<b>Bulb or Luminaire Shape:</b>	Linear
<b>Luminaire Fixing:</b>	Wall / Ceiling / Pendant / Conduit mounted
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power Consumption (w):</b>	43
<b>Power Factor:</b>	0.9
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes



**Electric Current:** AC  
**Emergency Lumens (lm):** 250  
**EN:** EN-60598  
**LVD Certified:** Yes

## Light Data

**Luminous Flux in Lumens (lm):** 5600  
**Luminous efficacy (lm/W):** 130  
**Correlated Colour Temperature (CCT) (K):** 4000  
**Colour Temperature:** 4000K - Cool White  
**Colour Temperature Name:** Cool White  
**Beam Angle:** 120  
**Colour Rendering Index (CRI):** 80  
**Frequency Range (Hz):** 50/60  
**Instant on (Less than 1 second):** Yes  
**LED Size (mm):** 2835  
**LED Type:** Surface mounted device (SMD)  
**Lifetime (hours):** 30000  
**Lumens in Emergency mode (lm):** 250  
**Useful Lumens (lm):** 400

## Environment

**EN:** EN-60598  
**LVD Certified:** Yes  
**CE RoHS:** Yes  
**New Energy Rating:** E  
**Hg 0% (Mercury Free):** Yes  
**IP Rating (Ingress Protection):** IP20  
**Lowest Operating Temperature (°C):** -20  
**Maximum Operating Temperature (°C):** 50

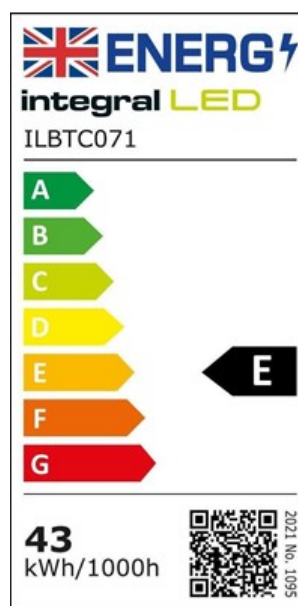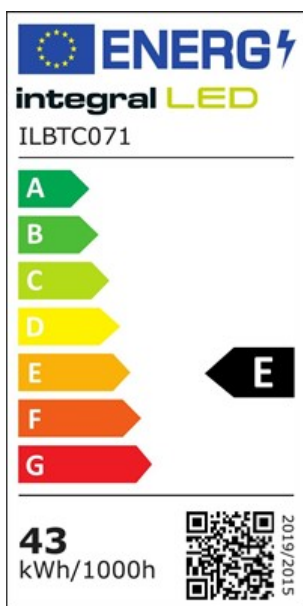

## Packaging

**Package Weight (g):** 1650 [Portal.integral-led.com](http://Portal.integral-led.com)  
**Package Length (mm):** 1175

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

<b>Package Width (mm):</b>	68
<b>Package Depth (mm):</b>	79