

**LIGHTSPAN T8 BATTEN 5FT SINGLE WITH SENSOR & EMERGENCY 3900LM
30W 130LM/W 4000K 120 BEAM LINKABLE NON-DIMM INTEGRAL**

ILBTC072



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	585625
Barcode:	5055788237006
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1470
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	1850
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	30
Power Factor:	0.9
Dimming:	Non-Dimmable
Driver Included:	Yes



Electric Current:	AC
Emergency Lumens (lm):	250
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	3900
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature:	4000K - Cool White
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Lumens in Emergency mode (lm):	250
Useful Lumens (lm):	400

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	E
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

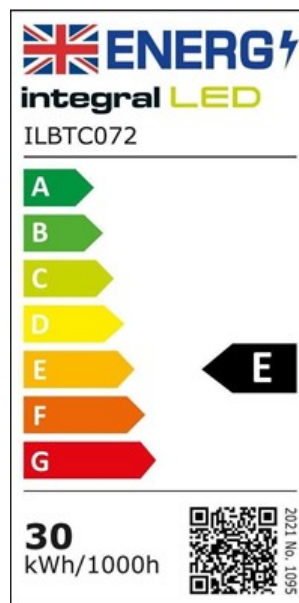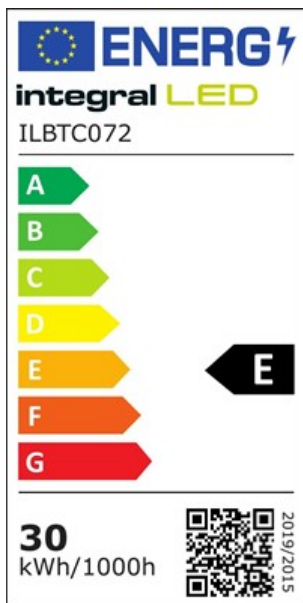

Packaging

Package Weight (g):	2100	Portal.integral-led.com
Package Length (mm):	1475	

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Width (mm):	68
Package Depth (mm):	79