

**LIGHTSPAN T8 BATTEN 5FT SINGLE EMERGENCY 3HR 3900LM 30W
130LM/W 4000K 120 BEAM 1470MM LINKABLE NON-DIMM INTEGRAL**

ILBTC114



Integral Lightspan Battens provide an efficient alternative to T8 fluorescent tube fittings. With their high lumen output, Lightspan battens are ideal for indoor commercial spaces that need bright task lighting and at up to 130lm/W they offer big energy savings compared to equivalent fluorescent fittings.

Details

Quick Order Code:	985014
Barcode:	5055788251279
Category:	Luminaires
Range Name:	Lightspan
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Indoor commercial, Industrial, residential
Finish:	Matt White
Features:	Emergency Function
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	1470
Product Depth (mm):	70
Product Width (mm):	60
Product Weight (g):	2300
Optic:	Polycarbonate diffuser
Material:	Polycarbonate, Aluminium
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Wall / Ceiling / Pendant / Conduit mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor, General Lighting

Electrical Data

Power Consumption (w):	30
-------------------------------	----



Power Factor:	0.9
Wattage equivalent (W):	58
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
Emergency Battery Life (years):	2
Emergency Type:	Non-Maintained
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	3600
Luminous efficacy (lm/W):	130
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Size (mm):	2835
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	30000
Lumens in Emergency mode (lm):	260
Useful Lumens (lm):	3600

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
New Energy Rating:	E
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK06
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	50

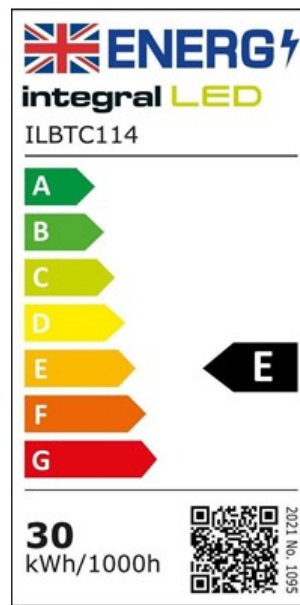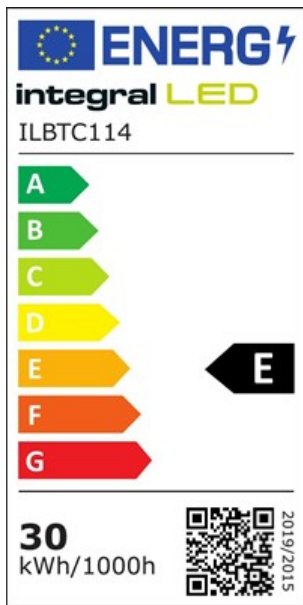

Packaging

Package Weight (g):	2420
Package Length (mm):	1475
Package Width (mm):	68
Package Depth (mm):	79

[Portal.integral-led.com](https://portal.integral-led.com)