

**VALUE+ BATTEN 1440LM 12W 4000K 120 BEAM 120LM/W 600MM 2FT
NON-DIMM INTEGRAL**

ILBTE062



This attractive and efficient LED batten offers a fantastic balance of price and performance. Running at 120lm/W, this batten will provide major energy and cost savings over legacy fluorescent technology. Schools, offices and many other workplaces will benefit from the good looks and efficient performance of the Value+ Batten.

Details

Quick Order Code:	826222
Barcode:	5055788242598
Category:	Luminaires
Range Name:	Value+
Type:	Single
Product Type:	Battens
Product Body Finish:	Matt white
Market Segment:	Commercial & Industrial
Finish:	Matt White
Warranty (Years):	3
CE RoHS:	Yes

Physical Data

Product Length (mm):	667
Product Depth (mm):	37
Product Width (mm):	54
Product Weight (g):	190
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Injection moulding
Bulb or Luminaire Shape:	Linear
Luminaire Fixing:	Ceiling mounted
Mounting Type:	Rear & Side Cable Entry
Placement / Application:	Indoor

Electrical Data

Power Consumption (w):	12
-------------------------------	----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	1440
Luminous efficacy (lm/W):	120
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	120
Colour Rendering Index (CRI):	80
Frequency Range (Hz):	50/60
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	35000
Switching Cycles:	100000
Useful Lumens (lm):	1440

Environment

LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP20

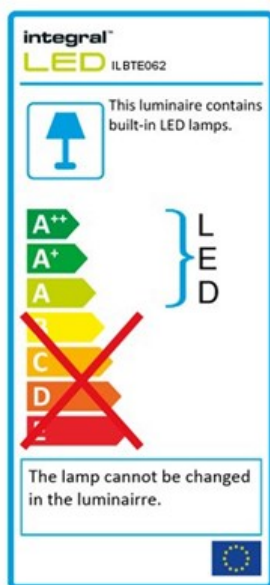

Packaging

Package Weight (g):	240
Package Length (mm):	700
Package Width (mm):	60
Package Depth (mm):	48

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE