LED IP65 Batten 55W 6ft Non-Linkable

Please note: Length measurement refers only to the batten (excluding cable glands)

Integral IP65 LED battens are highly efficient, perfect for new installations and ideal for replacing traditional waterproof luminaires.

The batten range has a white injection moulded housing and diffuser. To connect more than one batten in a series, use the cable entry gland supplied with the batten. Fixing brackets are also included and the LED driver is integrated for easier installation.

Product Details

Partcode: ILBTOA008

Check Code: 998002

Product Type: Battens

Warranty: 3 Years

CE / RoHS: Yes

Physical Data

Base Colour: Matt white

Product Finish: Matt white

Optic: Polycarbonate diffuser

Material: Polycarbonate

Construction: Injection moulding

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Physical Data

Length: 1 866mm

Width: 75mm

Depth: 52mm

Weight (Unpackaged Single Unit): 1370g

Lamp or Luminaire Shape: Linear

Luminaire Fixing: Wall/Ceiling mounted

Electrical Data

Voltage Range: 220-240V

Power Consumption: 55.0 Watts

Driver included: Yes

Electric Current: AC

Frequency Range: 50 Hz

Power Factor: >=0.90

Dimming: Non-dimmable

LVD Certified: Yes

EN: EN-60598

Light Data

Lumens: 6,325lm

Lumens per Watt: 115.0lm/W

Beam Angle: 120º

Correlated Colour Temperature (CCT): 4,000k

Colour Temperature: Cool White

Colour Rendering Index (CRI): >=80

LED Type: Surface mounted device (SMD)

LED Size: 2835

Instant on - Less than 1 second: Yes

Lifetime: 25,000 hrs

Switching Cycles: >12,500 X

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE

Environmental

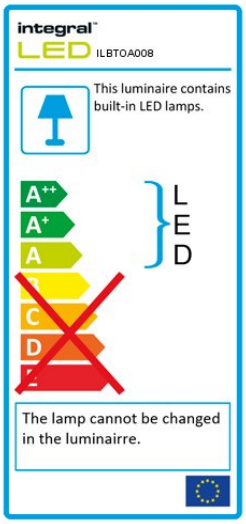

Lowest Operating Temperature: -10 degrees

Maximum Operating Temperature: 40 degrees

IP (Ingress Protection) Rating: IP65

Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788218210

Packaged Weight (Unit of 1): 1,490g

Length (unit of 1): 1,937mm

Width (unit of 1): 76mm

Depth (unit of 1): 54mm

Outer packaging info available on website

Product data last updated on: Monday, August 7, 2017 - 14:32

Product design and specification subject to change or modification without notice. Image for illustration only. E&OE