

Candle Filament Omni Lamp E14 3.5W (31W) 2700K 350lm Dimmable 300 deg Beam Angle

Partcode: ILCANDE14D050 / Page: 1



Integral Filament Omni Lamps utilise Filament LED technology and a full-glass body to create a decorative look and wide beam angle that looks fantastic in chandeliers and fittings where the lamp is exposed. These retrofit lamps are highly efficient and are an ideal replacement for traditional tungsten filament bulbs.

Product Details

Partcode: ILCANDE14D050

Check Code: 449722

Range Name: Omni

Market Segment: Commercial indoor, Residential indoor

Product Type: Candle

Warranty: 2 Years

CE / RoHS: Yes

Physical Data

Lamp Base: E14

Base Type: Small Edison screw

Globe Type: Candle

Globe Finish: Clear

Material: Aluminium, Glass

Construction: Glass shell, filament strip, Aluminium Base

Partcode: ILCANDE14D050 / Page: 2

Physical Data

Length: 99mm

Width: 35mm

Diameter: 35mm

Weight (Unpackaged Single Unit): 15g

Lamp or Luminaire Shape: Oval

Lamp Fixing: Pendant, Wall

Electrical Data

Voltage Range: 220-240V

Power Consumption: 3.5 Watts

Driver included: Yes

Electric Current: AC

Ampage: 16.00mA

Frequency Range: 50 Hz

Power Factor: ≥ 0.90

Wattage Equivalent: 31 Watts

Dimming: Dimmable

LVD Certified: Yes

EN: EN-62560

Light Data

Lumens: 350lm

Lumens per Watt: 100.0lm/W

Beam Angle: 300°

Correlated Colour Temperature (CCT): 2,700k

Colour Temperature: Warm

Colour Rendering Index (CRI): ≥ 80


LED Type: Filament chip

Instant on - Less than 1 second: Yes

Lifetime: 15,000 hrs

Switching Cycles: $>7,500$ X

Environmental

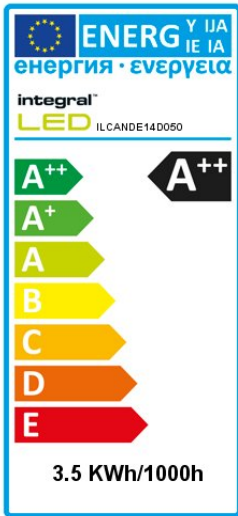

Energy Rating: A++

Lowest Operating Temperature: -20 degrees

Maximum Operating Temperature: 45 degrees

IP (Ingress Protection) Rating: IP20

Hg 0% (Mercury Free): Yes

Packaging

EAN Barcode (unit of 1): 5055788227724

Packaged Weight (Unit of 1): 65g

Length (unit of 1): 42mm

Width (unit of 1): 42mm

Depth (unit of 1): 108mm

Outer packaging info available on website

Product data last updated on: Monday, August 7, 2017 - 14:38